

# FLOOD INSURANCE STUDY

VOLUME 1 OF 5




## ARAPAHOE COUNTY, COLORADO AND INCORPORATED AREAS

### Notice

This preliminary FIS report includes only revised Flood Profiles and Floodway Data tables. See "Notice to Flood Insurance Study Users" page for additional details.

Community Name	Community Number
ARAPAHOE COUNTY UNINCORPORATED AREAS	080011
AURORA, CITY OF	080002
CENTENNIAL, CITY OF	080315
CHERRY HILLS VILLAGE, CITY OF	080013
COLUMBINE VALLEY, TOWN OF	080014
*DEER TRAIL, CITY OF	080015
ENGLEWOOD, CITY OF	085074
*FOXFIELD, TOWN OF	080091
GLENDALE, CITY OF	080247
GREENWOOD VILLAGE, CITY OF	080195
LITTLETON, CITY OF	080017
SHERIDAN, CITY OF	080018

\*NO SPECIAL FLOOD HAZARD AREAS IDENTIFIED

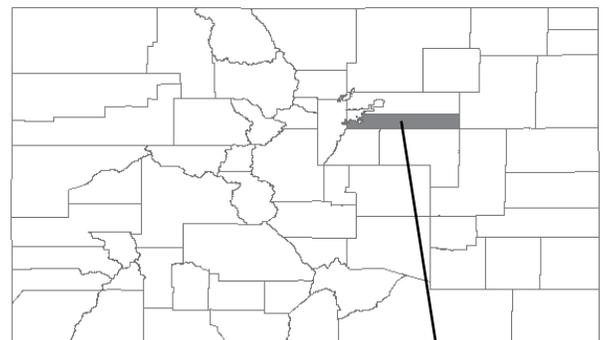

Arapahoe County

**PRELIMINARY  
JUNE 30, 2016**



Federal Emergency Management Agency

FLOOD INSURANCE STUDY NUMBER

08005CV001C

NOTICE TO  
FLOOD INSURANCE STUDY USERS

Communities participating in the National Flood Insurance Program have established repositories of flood hazard data for floodplain management and flood insurance purposes. This Flood Insurance Study (FIS) may not contain all data available within the repository. It is advisable to contact the community repository for any additional data.

Part or all of this FIS may be revised and republished at any time. In addition, part of this FIS may be revised by the Letter of Map Revision process, which does not involve republication or redistribution of the FIS report. It is, therefore, the responsibility of the user to consult with community officials and to check the community repository to obtain the most current FIS report components.

This FIS report was revised on XXX XX, 2016. Users should refer to Section 10.0, Revisions Description, for further information. Section 10.0 is intended to present the most up-to-date information for specific portions of this FIS report. Therefore, users of this report should be aware that the information presented in Section 10.0 supersedes information in Sections 1.0 through 9.0 of this FIS report.

Initial FIS Report Effective Date: April 17, 1989

Revised FIS Report Dates: August 16, 1995  
October 7, 2008  
December 17, 2010  
**XXXXXX XX, 2016**

**The Preliminary FIS report does not include unrevised Floodway Data tables or unrevised Flood Profiles. These unrevised components will appear in the final FIS report.**

(This page intentionally left blank)

**TABLE OF CONTENTS – VOLUME I**

**1.0 INTRODUCTION..... 1**

1.1 Purpose of Study ..... 1

1.2 Authority and Acknowledgements ..... 1

1.3 Coordination ..... 3

**2.0 AREA STUDIED ..... 4**

2.1 Scope of Study ..... 4

2.2 Community Description..... 7

2.3 Principal Flood Problems..... 8

2.4 Flood Protection Measures ..... 10

**3.0 ENGINEERING METHODS ..... 11**

3.1 Hydrologic Analyses..... 12

3.2 Hydraulic Analyses..... 25

3.3 Vertical Datum..... 26

**4.0 FLOODPLAIN MANAGEMENT APPLICATIONS ..... 28**

4.1 Floodplain Boundaries ..... 28

4.2 Floodways ..... 29

**5.0 INSURANCE APPLICATIONS..... 52**

**6.0 FLOOD INSURANCE RATE MAP ..... 53**

**7.0 OTHER STUDIES ..... 55**

**8.0 LOCATION OF DATA ..... 55**

**9.0 BIBLIOGRAPHY AND REFERENCES ..... 56**

**10.0 REVISION DESCRIPTIONS..... 64**

10.1 First Revision ..... 64

10.2 Second Revision ..... 66

10.3 Third Revision ..... 69

10.4 Fourth Revision..... 71

10.5 Fifth Revision..... 72

10.6 Sixth Revision..... 73

**11.0 MAP REPOSITORIES ..... 76**

**FIGURES**

Figure 1 - Frequency-Discharge, Drainage Area Curves,  
Coal Creek, Cherry Creek, Sand Creek ..... 14

Figure 2 - Frequency-Discharge, Drainage Area Curves,  
Cottonwood Creek, Big Dry Creek..... 15

Figure 3 - Frequency-Discharge, Drainage Area Curves,  
Murphy Creek, Little Comanche Creek..... 16

Figure 4 - Frequency-Discharge, Drainage Area Curves,  
Comanche Creek, West Bijou Creek, Box Elder Creek ..... 17

Figure 5 - Floodway Schematic ..... 30

Figure 6 - Notes to Users ..... 77

Figure 7 - Map Legend for FIRM..... 79

**TABLES**

Table 1 – Flooding Sources Studied by Detailed Methods..... 5

Table 2– Flooding Sources Restudied or Newly Studied by Detailed Methods..... 5

Table 3– Flooding Sources Studied by Approximate Methods ..... 6

Table 4 – Summary of Discharges..... 18

Table 5 – Floodway Data Table..... 31

Table 6 – Community Map History ..... 54

Table 7 – Map Repositories ..... 76

**VOLUME II**

**EXHIBITS**

Exhibit 1 – Flood Profiles

Antelope Creek	Panels 01P-07P
Antelope Creek Split Flow	Panel 08P
Bear Creek	Panels 09P-10P
Bear Gulch	Panels 11P-18P
Big Dry Creek	Panels 19P-37P
Big Dry Creek Tributary A	Panels 38P-40P
Blackmer Gulch	Panels 41P-46P
Box Elder Creek	Panels 47P-74P

## **VOLUME III**

### **EXHIBITS**

#### Exhibit 1 – Flood Profiles

Cherry Creek	Panels 75P-84P
Cherry Creek (Right Overbank Split Flow)	Panel 85P
Cherry Creek Spillway Drain	Panels 86P-87P
Coal Creek	Panels 88P-100P
Coal Creek Split	Panels 101P-102P
Comanche Creek	Panel 103P
Coon Creek	Panel 104P
Cottonwood Creek	Panels 105P-111P
Coyote Run	Panels 112P-127P
Dutch Creek	Panels 128P-130P
East Toll Gate Creek	Panels 131P-142P
First Creek	Panels 143P-151P
First Creek E-470 Split	Panel 152P
First Creek Tributary T	Panels 153P-156P
Goldsmith Gulch	Panels 157P-161P
Granby Ditch	Panels 162P-166P
Greenwood Gulch	Panels 167P-173P
Greenwood Gulch Bypass	Panels 174P-176P

## **VOLUME IV**

### **EXHIBITS**

#### Exhibit 1 – Flood Profiles

Happy Canyon Creek	Panel 177P
Havana Tributary	Panels 178P-179P
Inverness Tributary	Panels 180P-181P
Lee Gulch	Panels 182P-191P
Little Comanche Creek	Panel 192P
Little Dry Creek	Panels 193P-219P
Little's Creek	Panels 220P-221P
Lone Tree Creek	Panels 222P-235P
Murphy Creek	Panels 236P-247P
Murphy Creek Tributary	Panel 248P
Peoria Tributary	Panels 249P-251P
Piney Creek	Panels 252P-264P
Piney Creek Split Flow	Panels 265P

**VOLUME V**

**EXHIBITS**

Exhibit 1 – Flood Profiles

Prentice Gulch	Panel 266P
Quincy Gulch	Panels 267P-270P
Sable Ditch	Panels 271P-274P
Sable Ditch Overflow	Panel 275P
Sand Creek	Panels 276P-279P
Second Creek	Panels 280P-281P
Senac Creek	Panels 282P-285P
SJCD 6100	Panels 286P-288P
SJCD 6200	Panels 289P-290P
Slaughterhouse Gulch	Panels 291P-295P
South Platte River	Panels 296P-297P
South Tributary Slaughterhouse Gulch	Panels 298P-299P
Spring Creek	Panels 300P-301P
Sterne Parkway Overflow	Panel 302P
Toll Gate Creek	Panels 303P-305P
Toll Gate Creek I-225 Split	Panel 306P
Tributary to Unnamed Creek	Panel 307P
Unnamed Creek	Panels 308P-312P
West Bijou Gulch	Panels 313P-315P
West Harvard Gulch	Panels 316P-318P
West Toll Gate Creek	Panels 319P-327P
West Toll Gate Creek Tributary	Panel 328P
West Tributary To Goldsmith Gulch	Panels 329P-331P
Westerly Creek	Panels 332P-337P
Westerly Creek Overflow	Panel 338P
Willow Creek	Panels 339P-342P
Wolf Creek	Panels 343P-344P
Wolf Creek Tributary	Panel 345P

Exhibit 2 – Flood Insurance Rate Map Index  
Flood Insurance Rate Map

**FLOOD INSURANCE STUDY  
ARAPAHOE COUNTY, COLORADO AND INCORPORATED AREAS**

**1.0 INTRODUCTION**

1.1 Purpose of Study

This Flood Insurance Study (FIS) revises and supersedes the FIS reports and/or Flood Insurance Rate Maps (FIRMs) in the geographic area of Arapahoe County, Colorado including: the Cities of Aurora, Centennial, Cherry Hills Village, Deer Trail, Englewood, Glendale, Greenwood Village, Littleton and Sheridan; the Towns of Columbine Valley and Foxfield; and unincorporated areas of Arapahoe County (hereafter referred to collectively as Arapahoe County), and aids in the administration of the National Flood Insurance Act of 1968 and the Flood Disaster Protection Act of 1973. The Cities of Aurora and Littleton each fall in more than one county, but are included in their entirety in this FIS. The Town of Bennett falls in both Arapahoe and Adams Counties, but is excluded from this FIS and included in its entirety in the Adams County FIS. The Town of Bow Mar falls in both Arapahoe and Jefferson counties, but is excluded from this FIS and included in its entirety in the Jefferson County FIS. The Towns of Foxfield and Deer Trail are not prone to flooding. This study has developed flood risk data for various areas of the community that will be used to establish actuarial flood insurance rates. This information will also be used by Arapahoe County and incorporated areas to update existing floodplain regulations as part of the Regular Phase of the National Flood Insurance Program (NFIP), and by local and regional planners to further promote sound land use and floodplain development. Minimum floodplain management requirements for participation in the NFIP are set forth in the Code of Federal Regulations at 44 CFR, 60.3.

In some states or communities, floodplain management criteria or regulations may exist that are more restrictive or comprehensive than the minimum Federal requirements. In such cases, the more restrictive criteria take precedence, and the State (or other jurisdictional agency) will be able to explain them.

1.2 Authority and Acknowledgements

The sources of authority for this FIS report are the National Flood Insurance Act of 1968 and the Flood Disaster Protection Act of 1973.

The original hydrologic and hydraulic analyses for the Flood Insurance Study for the unincorporated areas of Arapahoe County were performed by Gingery and Associates, Inc., for the Federal Insurance Administration (FIA), under Contract No. H-3716. This work was completed in July 1975 (Reference 1).

Hydrologic and hydraulic information for portions of Bear Creek, Big Dry Creek, Blackmer Gulch, Cherry Creek, Dutch Creek, Granby Ditch, Goldsmith Gulch,

West Tributary to Goldsmith Gulch, Greenwood Gulch, Lee Gulch, Littles Creek, Little Dry Creek, Quincy Gulch, Sable Ditch and Sable Ditch Overflow, Sand Creek, Slaughterhouse Gulch and its South Tributary, Toll Gate Creek, West Toll Gate Creek, West Toll Gate Creek Tributary, East Toll Gate Creek, Unnamed Creek, West Bijou Creek, Westerly Creek, Columbia Creek, and Side Creek and its Tributary were taken directly from the existing Flood Insurance Studies for Aurora, Cherry Hills Village, Columbine Valley, Englewood, Greenwood Village, Littleton, and Sheridan (References 2 through 9, respectively).

The hydrologic and hydraulic analyses for portions of First, Piney, Murphy, Lone Tree, Happy Canyon, Cottonwood and Littles Creeks and Lee Gulch were performed by J.F. Sato and Associates, for the Federal Emergency Management Agency (FEMA), under Contract No. EMW-84-C-1631. This work was completed in August 1985 (References 10, 11, 12, 13, 14, 15, and 16).

The hydraulic analyses for a portion of Cherry Creek extending from Cherry Creek State Recreation Area to the Arapahoe Douglas County line were performed by Greiner Engineering, as reported in River Run Development, Letter of Map Revision, Arapahoe County, Colorado, (Reference 17).

The revised hydraulic analyses for portions of East Toll Gate and West Toll Gate Creeks were performed by Merrick and Company, Greiner Engineering, and the City of Aurora Engineering Division (References 18, 19, 20, 21, and 22).

The hydraulic analysis for a portion of Unnamed Creek (Tributary to West Toll Gate Creek) was performed by Holland Corporation (Reference 23).

The hydrologic study of the South Platte River, from Chatfield Dam to the corporate limits of the City and County of Denver, was prepared by Merrick and Company, under contract to the Urban Drainage and Flood Control District (UDFCD), and was completed in May 1983.

The hydraulic analyses for the South Platte River, from the corporate limits of the City and County of Denver, upstream to the U.S. Army Corps of Engineers (COE) Channel Improvement Project, were performed by Wright Water Engineers, under contract to UDFCD, and were completed in September 1985. The hydraulic analyses of the COE Channel Improvement Project were also performed by Wright Water Engineers under contract to UDFCD (completed in September 1987). The hydraulic reanalyses of the South Platte River, from the COE Channel Improvement Project (Fairway Lane) upstream to the Chatfield Dam, were based on the COE September 1979 hydraulic computer model-, using the discharges determined by the May 1983 Merrick hydrologic study and was carried out by the FEMA Technical Evaluation Contractor, in November 1987.

For this countywide FIS report, revised hydrologic and hydraulic analyses were taken from reports prepared for the UDFCD on Box Elder Creek by Wright Water

Engineers and CH2MHill (Reference 83), Cherry Creek by URS Corporation (Reference 85), Little Dry Creek and Tributaries by WRC Engineering, Inc. (Reference 86), Goldsmith Gulch by Moser and Associates (Reference 87), SJCD 6200 by Olsson Associates (Reference 90) and Murphy Creek by Moser and Associates (Reference 91). These analyses were completed under contract with the UDFCD.

Base Map information shown on this FIRM was provided by the Arapahoe County GIS. Additional input was provided by the Cities of Aurora and Littleton. These data are current as of 2004.

The coordinate system used for the production of the digital FIRM is Universal Transverse Mercator referenced to North American Datum of 1983 and the GRS 80 spheroid, Western Hemisphere.

### 1.3 Coordination

The Arapahoe County Planning Department supplied zoning and corporate boundary maps for areas throughout the county. Conferences were held with the County staff on June 5, July 15, and July 24, 1975. The final community coordination meeting for the original study of the unincorporated areas was held on September 16, 1975. The COE, Omaha District, supplied base mapping, hydrologic input, and information on Chatfield Dam for the study reach of the South Platte River. In addition, conferences were held with the COE, Omaha District, on October 16, 1974, November 27, 1974, and March 21, 1975. Of particular significance to this study was a COE floodplain information study of the Denver Metropolitan Region, dated October 1968 (Reference 24) and a Floodplain Information report prepared by the COE, dated July 1971 (Reference 25).

The U.S. Geological Survey (USGS) was contacted to obtain historical flow data (References 26, 27, and 28). Maps of flood-prone areas prepared by the USGS, showing approximate floodplain boundary delineations at a scale of 1:24,000, were also reviewed (Reference 29).

At a meeting on August 16, 1974, attended by representatives of UDFCD, FIA, and Gingery Associates, Inc., the study reaches were clearly explained with the methodology to be used in the study. An additional meeting was held on January 24, 1975, to further clarify the purpose of the study and methods used for floodplain delineation. UDFCD supplied contour maps at 2-foot intervals for Big Dry Creek, Sand Creek, and Coal Creek along with an interim report entitled Major Drainageway Master Plan--Big Dry Creek (Reference 30).

Numerous other agencies and individuals were contacted for background information, including the Colorado Water Conservation Board (CWCB), which provided published rainfall-runoff data (Reference 31); Colorado Highway Department; Union Pacific Railroad; and U.S. Soil Conservation Service (SCS).

Private citizens of Watkins, Strasburg, Byers, and Deer Trail were interviewed regarding past floods, high-water marks, and flood damage.

Prior to the restudy, a meeting was held in early April 1984 with the Arapahoe County Engineering Department and UDFCD to define study reaches; however, no reaches were identified at this meeting. The study reaches were selected at a meeting in late April 1984 attended by the study contractor and FEMA.

An intermediate community coordination meeting for the restudy was held in July 1985 and attended by the County, the study contractor and the FEMA representative to explain the reaches studied and the methods used.

UDFCD provided copies of previous master plans and flood hazard delineation maps that covered some of the stream reaches being studied. The County provided up-to-date road maps and corporate boundary maps.

FEMA authorized a countywide restudy for Arapahoe County in December 1985.

For this countywide FIS report, an initial coordination meeting was attended by FEMA; Arapahoe County; the Cities of Aurora, Centennial, Cherry Hills Village, Englewood, Glendale, Greenwood Village, Littleton, and Sheridan; the Town of Columbine Valley; the CWCB; the UDFCD; Michael Baker, Jr., the National Service Provider; and Merrick and Co., the study contractor, on October 26, 2004. At this meeting, the communities were notified that their FIS report and FIRMs would be converted to a Digital FIRM (DFIRM) format. Additionally, streams to be added as detailed studies and approximate studies were selected, and base mapping and topographic mapping was provided by Arapahoe County along with the City of Aurora.

The results of this countywide study were reviewed at the final Consultation Coordination Officer (CCO) meeting held on December 18, 2008, at the Southeast Metro Stormwater Authority office in Englewood, Colorado. The meeting was attended by representatives of UDFCD, FEMA, the State of Colorado, FEMA contractors and local communities. All issues raised at that meeting have been addressed.

## **2.0 AREA STUDIED**

### **2.1 Scope of Study**

This FIS covers the geographic area of Arapahoe County, Colorado including the incorporated towns, cities, and communities which fall within more than one county as described in Section 1.1 (excluding the Towns of Bennett and Bow Mar).

All or portions of the flooding sources listed in Table 1 were studied by detailed methods in previous Flood Insurance Studies (FISs) covering Arapahoe County and Incorporated Areas (References 2 through 11, 88, and 89).

Table 1 – Flooding Sources Studied by Detailed Methods

<u>Stream</u>	<u>Stream</u>
Bear Creek	Piney Creek
Bear Gulch	Prairie Dog Draw
Big Dry Creek	Prentice Gulch
Big Dry Creek Tributary A	Quincy Gulch
Blackmer Gulch	Rat Run
Box Elder Creek	Sable Ditch
Cardboard Draw	Sand Creek
Cherry Creek	Slaughterhouse Gulch
Cherry Creek Spillway Drain	SJCD 6100
Coal Creek	SJCD 6200
Coon Creek	South Platte River
Cottonwood Creek	South Tributary
Coyote Run	Spring Creek
East Toll Gate Creek	Slaughterhouse Gulch
First Creek	Toll Gate Creek
Goldsmith Gulch	Unnamed Creek
Granby Ditch	West Toll Gate Creek
Greenwood Gulch	West Toll Gate Creek Tributary
Happy Canyon Creek	West Tributary To Goldsmith Gulch
Lee Gulch	Westerly Creek
Littles Creek	Westerly Creek Overflow
Little Dry Creek	Willow Creek
Lone Tree Creek	Wolf Creek
Murphy Creek	Wolf Creek Tributary
Muskrat Run	Woodrat Gulch

For the December 17, 2010 countywide FIS, the following streams in Table 2 were either restudied or newly studied by detailed methods.

Table 2– Flooding Sources Restudied or Newly Studied by Detailed Methods

<u>Stream</u>	<u>Limits of Revised or New Detailed Study</u>
Box Elder Creek	Downstream limits of Aurora to Jewell Ave. extended
Bear Gulch	Downstream limits of Aurora to 38 <sup>th</sup> Avenue
Blackmer Gulch	Confluence to High Line Canal
Cardboard Draw	Confluence to study limit
Cherry Creek	Reservoir to Douglas County Line
Cherry Creek (Right Overbank Split Flow)	Station 89292 to Station 91117
Coyote Run	Downstream limits of Aurora to Jewell Ave. extended

<b><u>Stream</u></b>	<b><u>Limits of Revised or New Detailed Study</u></b>
Goldsmith Gulch	Bellevue Avenue to Arapahoe Road
Greenwood Gulch	Confluence to Holly Street
Little Dry Creek	Clarkson to Quebec Street
Murphy Creek	Confluence to Study Limit
Muskrat Run	Confluence to upstream of Gun Club Road
Quincy Gulch	Confluence to High Line Canal
Prairie Dog Draw	Confluence to I-70
Prentice Gulch	Confluence to Holly Street
Rat Run	Confluence to study limit
Senac Creek	Confluence to approximately 7,843 feet upstream of East Quincy Avenue
SJCD 6200	Confluence to Jefferson County Line
Willow Creek	Confluence to Englewood Dam
Woodrat Gulch	Confluence to study limit
West Trib To Goldsmith	Confluence to Peakview Avenue

All or portions of the streams in Table 3 were studied by approximate methods in previous Flood Insurance Studies for Arapahoe County and Incorporated Areas (References 2 -11, 88, 89).

Table 3– Flooding Sources Studied by Approximate Methods

<b><u>Stream</u></b>
Box Elder Creek upper reaches
Coal Creek upper reaches
Comanche Creek
Drainageway D in Columbine Valley
East Bijou Creek
Columbia Creek
Deer Trail Creek
First Creek
Green Acres Tributary
Kiowa Creek
Little Comanche Creek
Middle Bijou Creek
Muddy Creek
Upper reaches of Piney Creek
Senac Creek
Side Creek
Unnamed Tributary to Coal Creek
West Bijou Creek
West Box Elder Creek
West Toll Gate Creek
West Toll Gate Creek Tributary
Wolf Creek

For this countywide FIRM, the existing FIRM was converted to a Digital FIRM (DFIRM). Detailed analyses were taken from the effective FIRM or from existing UDFCD reports. The existing detailed analysis was originally used in developed areas or areas with a high development potential. The existing approximate analysis was originally used to study those areas for which detailed information was not available or those areas having a low development potential or minimal flood hazards. The scope and methods of study were proposed to, and agreed upon by, FEMA, CWCB, UDFCD, Arapahoe County, and the incorporated communities within Arapahoe County. This update also incorporates Letters of Map Revision issued by FEMA.

## 2.2 Community Description

Arapahoe County is located in central Colorado, just south and east of Denver. The general physical boundary is that of a rectangle 12 miles by 72 miles, which extends from near the foothills of the Rocky Mountains to the open plains of eastern Colorado, covering approximately 864 square miles. The City of Aurora lies east of Denver, extending north into Adams County and south into Douglas County. The City of Littleton lies south and west of Denver, extending south into Douglas County and southwest into Jefferson County.

The climate in the study area varies slightly from the Denver metropolitan area to the prairie Lands on the eastern end; but, generally, it is characteristic of the temperate high plains. The mean annual temperature is 50.2°F; the mean annual snowfall is 45 inches, and the mean annual rainfall is 14.05 inches. With a mean growing season of 139 days, agriculture flourishes.

Today, Arapahoe County is still basically an agricultural and residential community, with most of the population concentrated in the western one-third of the county. During the past 25 years, the county population has grown rapidly as a result of Denver metropolitan area urbanization and subsequent extensive suburban development. County population figures for 1970 and 1980 are 161,000 and 293,621, respectively. This kind of suburban development pressure is now, and will continue to be, evident in and along the floodplains of Big Dry Creek, Little Dry Creek, Cottonwood Creek, Cherry Creek, Piney Creek, Sand Creek., Coal Creek, and the South Platte River. Residential growth has also occurred along the banks of Box Elder Creek and Comanche Creek.

The county lies within the South Platte River Basin, with headwaters extending into the Rocky Mountains to elevations of 14,000 feet. The waters of the South Platte River have been appropriated for municipal and irrigation usage. The South Platte River in Arapahoe County flows from south to north along the western edge of the county.

The South Platte River in Arapahoe County is a continuous flowing stream, whereas the tributaries are intermittent flowing streams. The South Platte River has two major flooding characteristics—snowmelt and summer thunderstorms. The tributary basins are narrow and have clayey-loam soils. In the undeveloped portions of the basins, the ground cover consists of buffalo grass, willows, and cottonwood trees.

Development has occurred up to the channels on the tributaries. The floodplain on the South Platte River in the past was mostly agricultural, but today commercial, industrial, and residential development has encroached onto the floodplain. In various reaches of the floodplains, development pressures continue to exist. The county government is working to retain the open space of the floodplain.

### 2.3 Principal Flood Problems

The South Platte River flows through the western edge of Arapahoe County in shifting channels in a broad, shallow bed with low, flat overbanks. Streams tributary to the South Platte River are ephemeral and flow in steep, narrow channels; whereas those in the eastern two-thirds of the county flow in wide, flat channels similar to the South Platte River. Sheetflow occurs within the City of Littleton on the lower reaches of Little Creek and Slaughterhouse Gulch.

All streams studied have had various structural improvements but the intense and infrequent thunderstorms characteristic of the area can generate floods in excess of existing structural capacities. The flood threat throughout the county has not been adequately defined and urbanization has occurred in certain areas without regard to the hazard.

Major floods have occurred on the South Platte River and its tributaries in Arapahoe County since 1844. During the period, 11 devastating floods have occurred on the South Platte River; 17 have occurred on Cherry Creek; 3 each have occurred on Bijou, Box Elder, Comanche, and Sand Creeks; and 1 has occurred on Toll Gate Creek. Historic flood information on other streams in Arapahoe County is not available.

In 1844 and 1864, reports read, "bottomlands near Denver were covered with water bluff to bluff." By 1876, encroachment into the floodplain had developed to such an extent that on May 23, 1876, the Rocky Mountain News reported, "(The South Platte River) was higher to be sure--several feet higher perhaps in 1864--but it was not able to work such destruction at that time as now. There was not so much town here in 1864, as now, nor as many bridges."

The most significant floods of recent times on the South Platte River occurred in 1912, 1921, 1933, 1935, 1942, and 1965 during which discharges of 13,000 cubic feet per second (cfs), 8,790 cfs, 22,000 cfs, 12,320 cfs, 10,200 cfs, and 40,300 cfs, respectively, were recorded. Cherry Creek experienced a similar flood

history, with discharges of 25,000 cfs, 34,000 cfs, 10,700 cfs, 17,600 cfs, 10,800 cfs and 39,900 cfs in 1912, 1933, 1945, 1946, 1963, and 1956, respectively.

In interviews held in Watkins, Strasburg, Byers, and Deer Trail regarding flood histories on Box Elder Creek, Comanche Creek, West Bijou Creek, and East Bijou Creek, residents recalled severe damage and lost lives in floods occurring in 1905, 1935, and 1965.

All of these floods of record on the South Platte River and tributaries have been generated near their headwaters on the slopes of Monument Divide, a high ridge located between Castle Rock and Colorado Springs and extending from the Rocky Mountains down into the plains near Limon, Colorado. Past floods of the mountain tributaries have resulted from snowmelt. Intensive rainstorms cause flooding in both the mountain tributaries and the eastern tributaries.

In 1912, Cherry Creek swelled to flood stage from cloudbursts centered simultaneously over Denver and the upper reaches of the creek. In 1933, similar circumstances caused the Castlewood Dam above Franktown in Douglas County to fail, sending a 34,000-cfs flow of water thundering down the canyon into Denver.

In 1965, the whole South Platte River Basin was drenched by a unique combination of orographic effects and meteorological conditions that caused the worst flooding in the region's recorded history. Severe thunderstorms had formed over the headwaters of Plum and Cherry Creeks on June 16 and slowly moved northeasterly down the creeks; thus, the heavy rains tended to follow and augment the peak flows. More than 14 inches of rain fell near Monument Divide at Palmer Lake in 4 hours. Overnight, westerly winds shifted the storm front to an orientation over the Kiowa and Bijou Creek basins to meet with thunderstorms forming just south of Agate, where 5.25 inches fell in 45 minutes. The net result was six persons drowned, two other deaths caused by flood-related activities, and estimated damages in the Denver area were \$500 million.

Flood problems in the area have been the result of not only rare storm events but also of improper floodplain development. Visual accounts of floods have noted that the debris transported by floodwater contained natural debris, such as trees, rock, and soil, but consisted chiefly of items foreign to the floodplain, such as houses, bridges, automobiles, heavy equipment, lumber, house trailers, butane storage tanks, and other flotsam. With these items obstructing bridges and culverts, flood levels rose and caused more extensive damage. Property which was not structurally damaged by flood depths and velocities experienced much damage and cleanup cost resulting from mud and silt deposition and erosion.

In September 12th through the 15th of 2013, a slow moving cold front circulated over the state, clashing with warm, humid monsoonal air from the south. During this time 6-18 inches of rain fell across the Front Range Foothills, Palmer Divide,

and Urban Corridor. Widespread flooding with record flood stages occurred. Heavy rain concentrated in the Aurora area with up to 3 inches of rain falling in one hour. Devastating flood damage encompassed 4,500 square miles of the Colorado Front Range, left seven dead, forced thousands to evacuate, and destroyed thousands of homes and farms. Record amounts of rainfall generated flash floods that tore up roads and lines of communication, leaving many stranded. Nearly 19,000 homes were damaged, and over 1,500 destroyed. The Colorado Department of Transportation estimated that at least 30 state highway bridges were destroyed and an additional 20 seriously damaged. A preliminary assessment of the state's infrastructure showed damage of \$40 million to roads and \$112 million to bridges. The projected losses for residential property alone were about \$900 million. Another \$1 billion was attributed to commercial and government property, including roads and bridges.

#### 2.4 Flood Protection Measures

The first tangible contribution to flood control on the streams flowing through Arapahoe County was made in 1890, when Castlewood Dam, primarily intended for irrigation storage, was completed by the Denver Land and Water Company on Cherry Creek, 35 miles upstream from Denver. The dam, with a storage capacity of 4 billion gallons, was mistakenly regarded by many as protection against deluges. In August 1933, the dam burst under pressure of water from severe thunderstorms in the upper Cherry Creek basin. Flood-control measures were taken on Cherry Creek in 1936 with the completion of the \$800,000, 55-foot-high Kenwood Dam, 5 miles southeast of Denver, near Sullivan, Colorado. Despite its apparent guarantee of security, Kenwood Dam was not regarded as the complete answer to flood control on Cherry Creek and was abandoned. In 1950, Cherry Creek Dam was constructed just upstream of the former Kenwood Dam at a cost of \$20 million. The dam spans 14,300 feet across the creek at a height of 140 feet, and now serves the community as a park and water recreation area as well as a retarding barrier for floods much larger than the event of June 1965. Cherry Creek Dam was designed and built by the COE to store the Standard Project Flood, which is approximately equivalent to the 500-year flood. The dam eliminates the flood potential from 385 square miles of the total drainage area of 409 square miles.

With the history of major flooding on the South Platte River through 1933, culminating in the planning, design, and construction of the Cherry Creek Reservoir in 1950, citizens of the Denver metropolitan area saw the need for an additional flood-control structure on the South Platte River, just downstream of the confluence with Plum Creek. During the 1950s, the planning and design for a flood-control reservoir were completed for Chatfield Dam. At that time, however, funding was not available to initiate and complete construction. The floods of 1965 changed the minds of many concerning the need for the structure. The loss of 8 lives and property damage assessed at \$300 million in the Denver area prompted the release of funds and construction began. In 1973, final closure of

the dam was made and the facility became capable of storing tributary floodwater. All the related reservoir improvements, including recreational facilities, became totally operational in 1976. Chatfield Dam is located approximately 0.5 mile above the City of Littleton corporate limits, in Douglas and Jefferson Counties. The reach of the South Platte River lying within Arapahoe County will still experience flooding from tributary streams at Littleton and downstream.

To assist the COE with needed flood-control measures along the 6.4 miles of the South Platte River that lie adjacent to the City of Littleton, in Arapahoe County, citizens of Littleton voted in 1971 to provide funds to assist the COE in implementing a mutually satisfactory project for flood control (References 32 and 33). In 1984, the City acquired and annexed property included within the 100-year floodplain limit within this 2-mile reach, and plans to retain the rural, open-space environment of the area.

On the remaining 4.4 miles of the South Platte River that are located in Arapahoe County and the City of Littleton, the COE had proposed a structural solution to flood control, incorporating channelization and diking. State funds have been appropriated for right-of-way acquisition and construction, for the purpose of this study, has been completed. The resulting channelization project contains the accepted 100-year flood discharge and, therefore, this segment of the river presents minimal flood hazard to the county and affected communities.

The UDFCD and City of Littleton constructed a 100-year capacity channel for Littles Creek from its confluence with the South Platte River to the railroad corridor. The UDFCD and City of Littleton constructed a detention facility near Grant Street and storm sewer upstream and downstream on Slaughterhouse Gulch to reduce the frequency and severity of flooding. The Colorado Department of Transportation constructed a 100-year capacity box culvert on Slaughterhouse Gulch from the South Platte River to upstream of Santa Fe drive as part of a transportation project.

A major flood control structure in the City of Aurora is Quincy Dam on West Toll Gate Creek, which was completed in 1974. The dam and reservoir serve as a water storage facility and provide approximately 4,5000 acre feet of storage for flood control. The dam controls the upper 4.5 square miles of the drainage basin.

The UDFCD and Town of Columbine Valley constructed a 100-year capacity channel on Dutch Creek from the South Platte River to Platte Canyon Drive.

Major drainageway planning reports have been completed for all of the major drainageways in the populated areas of the county. These reports designate various structural measures and nonstructural actions that would be appropriate to alleviate potential flood damage along these streams.

## 2.0 ENGINEERING METHODS

For the flooding sources studied by detailed methods in the community, standard hydrologic and hydraulic study methods were used to determine the flood hazard data required for this study. Flood events of a magnitude that are expected to be equaled or exceeded once on the average during any 10-, 50-, 100-, or 500-year period (recurrence interval) have been selected as having special significance for floodplain management and for flood insurance rates. These events, commonly termed the 10-, 50-, 100-, and 500-year floods, have a 10, 2, 1, and 0.2 percent chance, respectively, of being equaled or exceeded during any year. Although the recurrence interval represents the long-term, average period between floods of a specific magnitude, rate floods could occur at short intervals or even within the same year. The risk of experiencing a rare flood increases when periods of greater than 1 year are considered. For example, the risk of having a flood which equals or exceeds the 1-percent-annual-chance flood in any 50-year period is approximately 40 percent (4 in 10); for any 90-year period, the risk increases to approximately 60 percent (6 in 10). The analyses reported herein reflect flooding potentials based on conditions existing in the community at the time of completion of this study. Maps and flood elevations will be amended periodically to reflect future changes.

### 3.1 Hydrologic Analyses

Hydrologic analyses were carried out to establish the peak discharge-frequency relationships for each flooding source studied in detail affecting the geographic area of Arapahoe County.

Recorded flood information for the majority of the streams studied by detailed methods within Arapahoe County is nonexistent. Good records do exist for the South Platte River and Cherry Creek. Due to the construction of Chatfield Dam, the recorded information on the South Platte River is not applicable. As a result, synthetically derived hydrographs were computed to determine potential flood magnitudes for those streams with relatively small drainage basins in the Denver metropolitan area. These hydrographs reflect the effects of precipitation, ground cover, slope, drainage area, and other physical characteristics of the drainage basins. The synthetic hydrograph method was used on Big Dry Creek, Piney Creek, Cottonwood Creek, Murphy Creek, Cherry Creek, and South Platte River. Where available, hydrologic data were compared with other studies completed in the area (References 30, 34, and 35).

For the large drainage basins to the east of the Denver metropolitan area, flood magnitudes for the selected frequencies were computed using the USGS regional analysis outlined in Water Supply Paper 1680 (Reference 36) for Region B, Area 10. The relationship between flood magnitude and frequency, as portrayed in the composite frequency curve in Water-Supply Paper 1680, was extrapolated to give a ratio of 100-year flood discharge to mean annual discharge as the basis for the regional curve in Figures 1, 2, 3, and 4. The streams whose hydrology was derived from this regional analysis were the upper reaches of Piney Creek and Coal Creek,

Lone Tree Creek, Senac Creek, 1-05-4412 Creek, West Box Elder Creek, Box Elder Creek, Kiowa Creek, Wolf Creek., Comanche Creek, Little Comanche Creek, West Bijou Creek, Middle Bijou Creek, and Deer Trail Creek. This curve was used as a comparison for synthetically generated hydrograph flows for each stream in the study. For some streams, the 100-year flood discharge generated by hydrograph methods is higher than the curve would indicate due to the effects of recent urbanization.

The South Platte River peak discharges for the 100- and 500-year floods below the dam were computed to reflect information on the operation of Chatfield Dam. For that reason, the South Platte River does not match the USGS regional data.


Rainfall data for the synthetic hydrologic analyses was taken from the UDFCD Urban Storm Drainage Criteria Manual (Reference 37). Synthetic hydrograph procedures used in the study included the Colorado Urban Hydrograph Procedure (CUHP), outlined in the UDFCD Manual (Reference 37), and the COE HEC-1 Flood Hydrograph Package (Reference 38). The 500-year flood discharges for all detailed-study streams were checked by straight-line extrapolation of frequencies previously determined using the procedure of the USGS (References 27 and 36), and compared to the COE Standard Project Flood data when available.

Hydrologic analyses included in the Flood Insurance Studies for the incorporated communities of Aurora, Cherry Hills Village, Littleton, and Sheridan were incorporated into the restudy in their entirety with the exception of streams or portions of streams which were superseded by more up-to-date information (References 2, 3, and 5 through 9).

In addition, hydrologic data from various engineering reports (discussed in Section 7.0) were used extensively in the restudy of Arapahoe County. The methods used in these reports include CUHP, MITCAT, and Stormwater Management Model (References 10, 11, 12, 13, 14, 15, and 16).

Peak discharge-drainage area relationships for the streams studied by detailed methods within Arapahoe County, except Spring Creek and SJCD 6100, are shown in Table 4 and Figure 1 through Figure 4.

Figure 1 - Frequency-Discharge, Drainage Area Curves, Coal Creek, Cherry Creek, Sand Creek

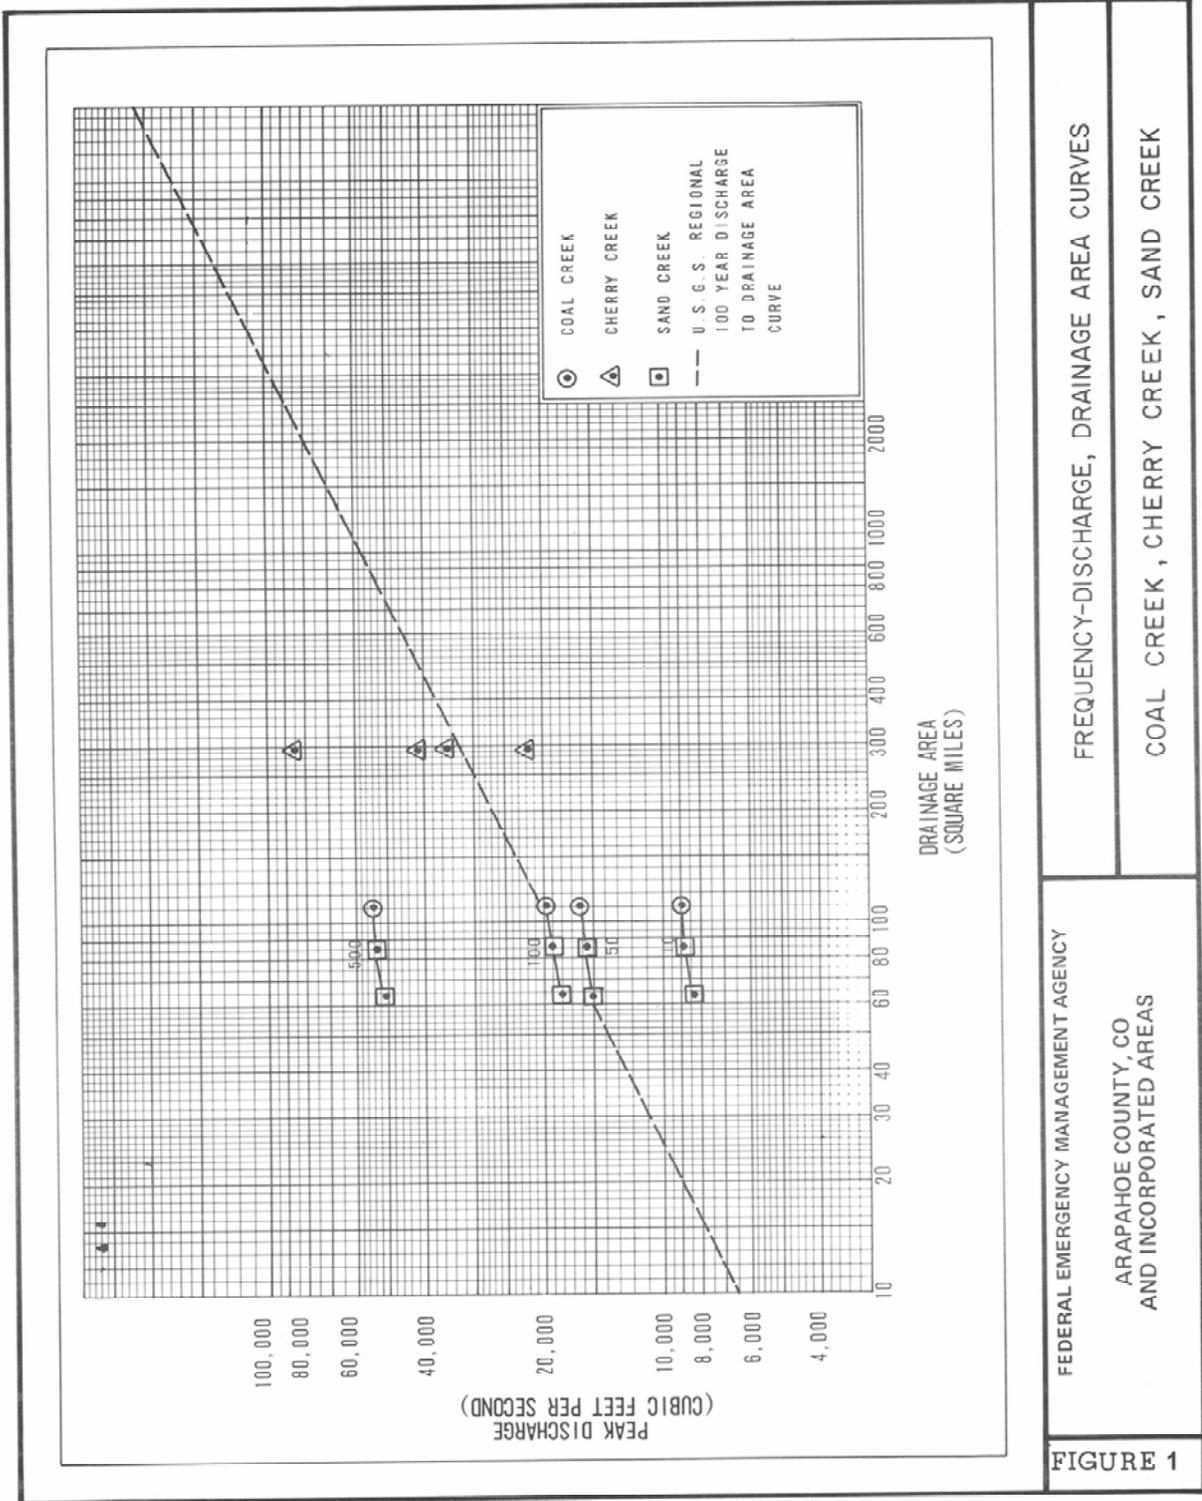


FREQUENCY-DISCHARGE, DRAINAGE AREA CURVES  
 COAL CREEK, CHERRY CREEK, SAND CREEK

FEDERAL EMERGENCY MANAGEMENT AGENCY  
 ARAPAHOE COUNTY, CO  
 AND INCORPORATED AREAS

FIGURE 1

Figure 2 - Frequency-Discharge, Drainage Area Curves, Cottonwood Creek, Big Dry Creek

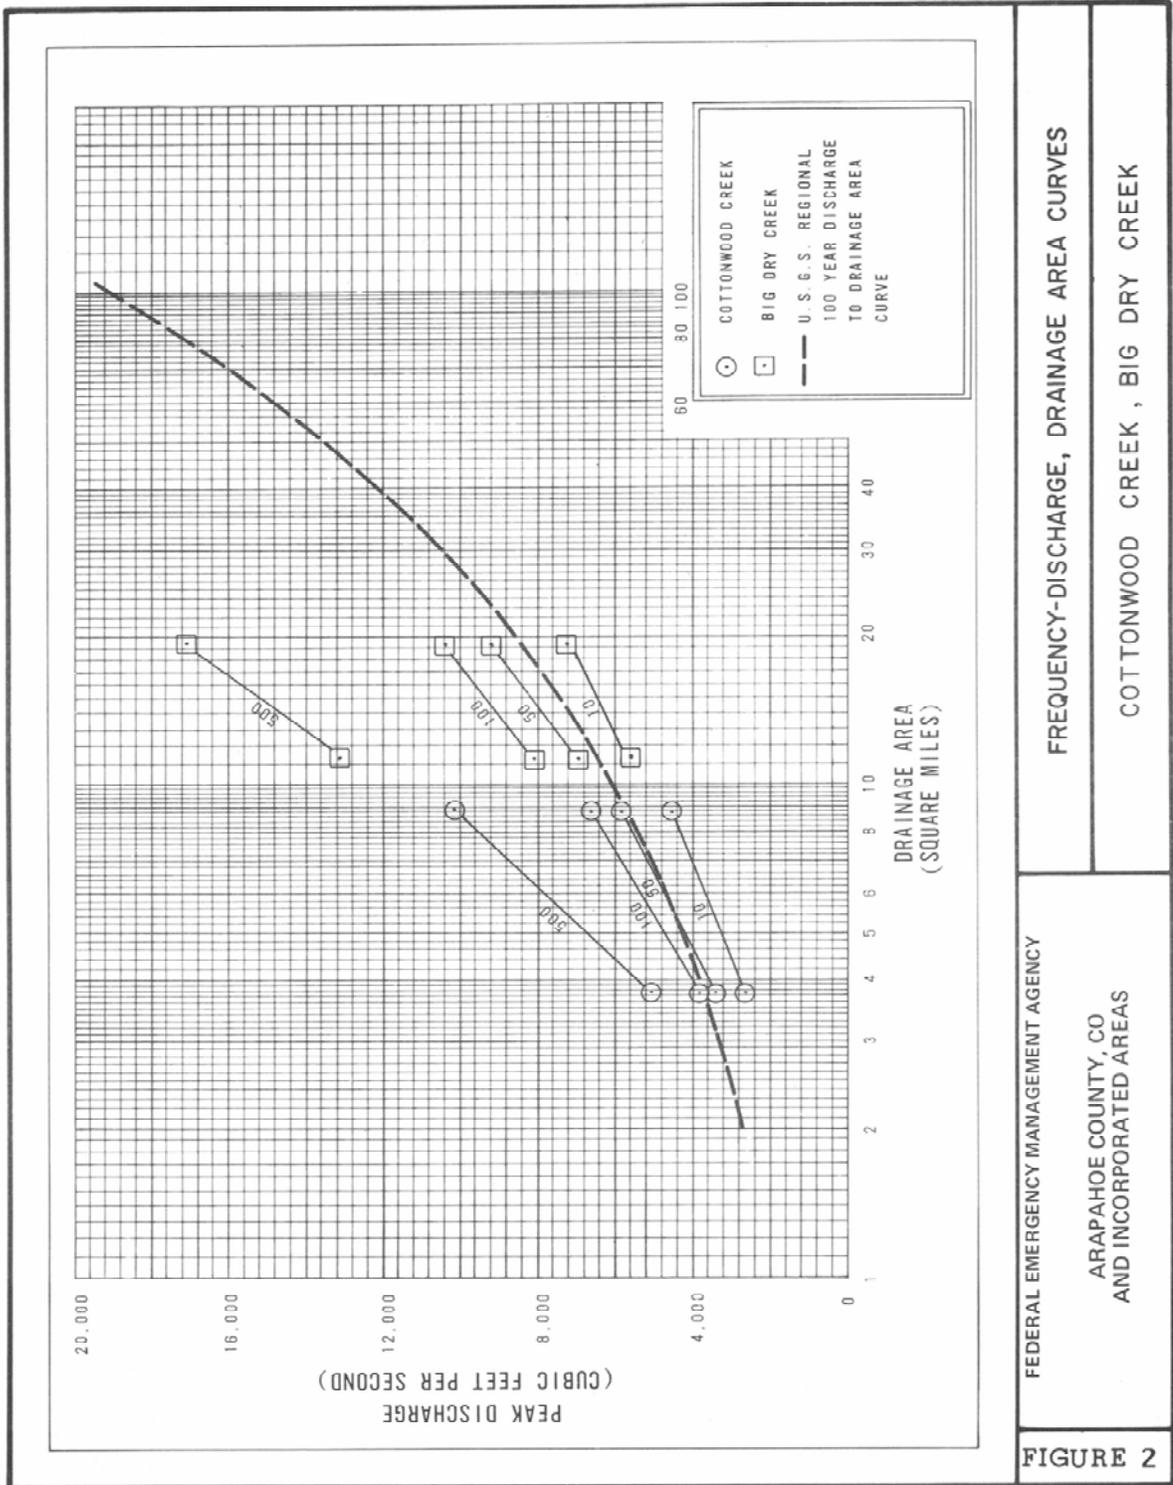

FREQUENCY-DISCHARGE, DRAINAGE AREA CURVES

COTTONWOOD CREEK, BIG DRY CREEK

FEDERAL EMERGENCY MANAGEMENT AGENCY

ARAPAHOE COUNTY, CO  
AND INCORPORATED AREAS

FIGURE 2

Figure 3 - Frequency-Discharge, Drainage Area Curves, Murphy Creek, Little Comanche Creek

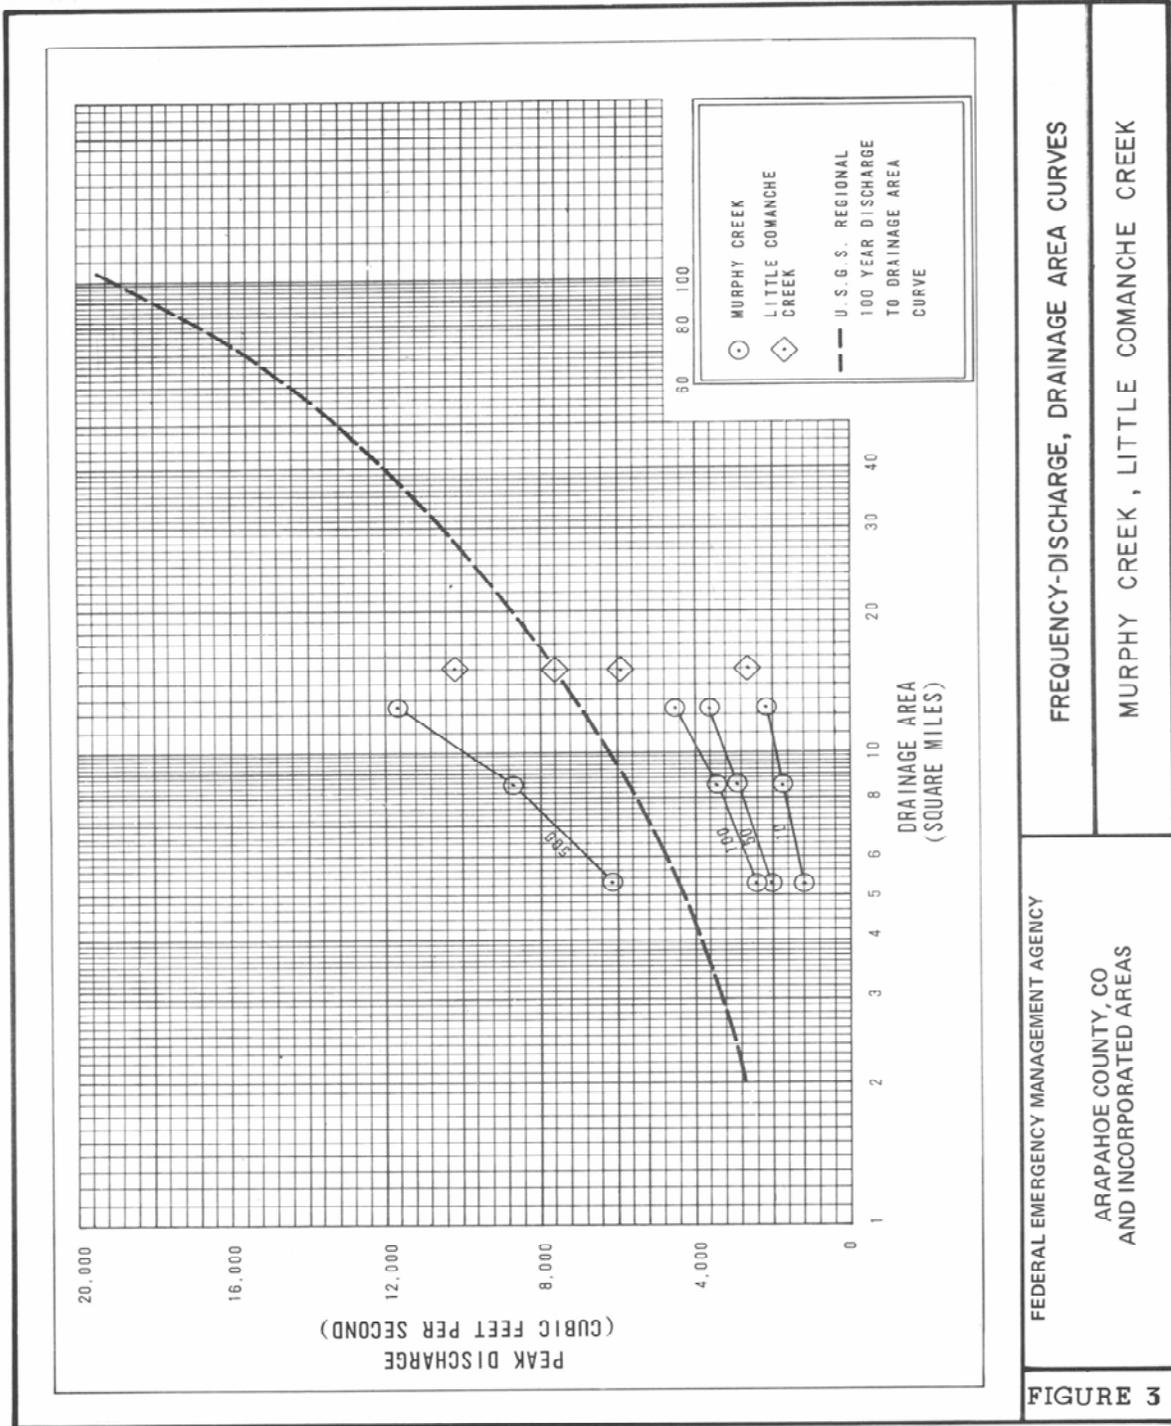


Figure 4 - Frequency-Discharge, Drainage Area Curves, Comanche Creek, West Bijou Creek, Box Elder Creek

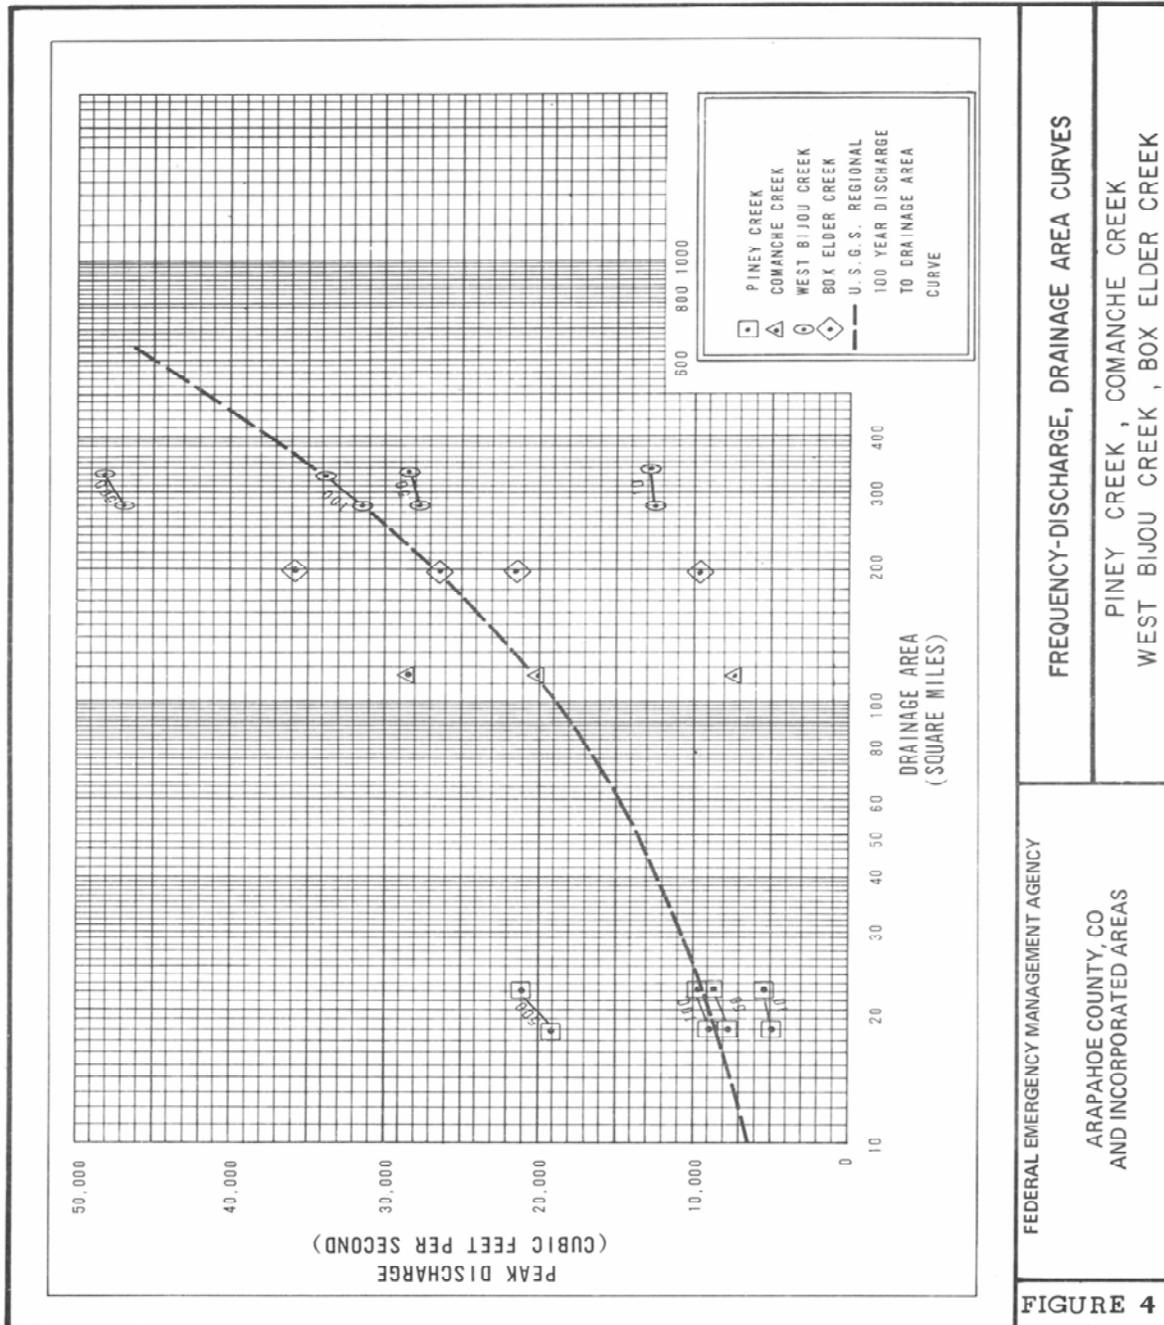


Table 4 – Summary of Discharges

<u>Flooding Source/Location</u>	<u>Drainage Area (Square Miles)</u>	<u>Peak Discharges (Cubic Feet per Second)</u>			
		<u>10% Annual Chance</u>	<u>2% Annual Chance</u>	<u>1% Annual Chance</u>	<u>0.2% Annual Chance</u>
Antelope Creek At Confluence with Piney Creek	2.5	730	1,820	2,430	4,060
Antelope Creek Split Flow At Confluence with Piney Creek	-- <sup>1</sup>	-- <sup>2</sup>	138	210	428
Bear Creek At Mouth	22	4,170	6,920	8,150	11,280
Bear Gulch At Mouth	19.8	1410	4360	6300	10200
Big Dry Creek Above Windermere Street	11.0	5,100	7,000	8,100	13,100
At Confluence with South Platte River	19.0	7,100	9,100	10,400	17,200
At Littleton Boulevard	19.5	7,000	9,250	10,400	10,750
Blackmer Gulch At Confluence with Greenwood Gulch	2.3	1,390	1,850	1,950	2,330
At Confluence with Quincy Gulch	1.5	780	1,040	1,100	1,330
At Holly Street	0.5	385	500	540	640
Box Elder Creek Upstream of Coyote Run	173.5	780	5,520	8,760	15,000
At I-70	165.5	780	5,560	8,820	15,100
At Upstream Limit of Study	127.2	780	5,590	8,880	15,200
Cardboard Draw At Mouth	2.3	270	710	990	1,520
Cherry Creek Approximately 645 feet downstream of South Monaco Parkway	-- <sup>1</sup>	2,892	4,725	6,000	-- <sup>1</sup>
At Colorado Boulevard	-- <sup>1</sup>	2,892	5,661	7,320	-- <sup>1</sup>
Cherry Creek Spillway Drain At Mouth	1.9	610	2,100	3,180	7,700
Cherry Creek (Right Overbank Split Flow) At Arapahoe Road	-- <sup>1</sup>	1	2,090	7,077	62,211

<u>Flooding Source/Location</u>	<u>Drainage Area (Square Miles)</u>	<u>Peak Discharges (Cubic Feet per Second)</u>			
		<u>10% Annual Chance</u>	<u>2% Annual Chance</u>	<u>1% Annual Chance</u>	<u>0.2% Annual Chance</u>
<b>Coal Creek</b>					
Approximately 2,150 feet Upstream of Picadilly Road	-- <sup>1</sup>	4,950	10,450	13,400	19,000
Approximately 2,000 feet Downstream of East Jewell Avenue	82.2	5,928	13,159	16,994	24,547
Downstream of East Jewell Avenue	80.5	5,896	13,142	16,974	24,505
Approximately 1,700 feet Upstream of Jewell Avenue	79.6	5,872	13,104	16,932	24,440
Downstream of Senac Creek	78.7	5,820	13,022	16,837	24,296
Above Confluence with Senac Creek	67.8	4,972	11,489	14,982	21,714
<b>Coal Creek Split</b>					
Upstream of E-470	-- <sup>1</sup>	-- <sup>1</sup>	63	629	-- <sup>1</sup>
At South Gun Club Road	-- <sup>1</sup>	-- <sup>1</sup>	105	1,018	3,951
<b>Coon Creek</b>					
At Confluence with Dutch Creek	-- <sup>1</sup>	-- <sup>1</sup>	-- <sup>1</sup>	2,900	-- <sup>1</sup>
<b>Cottonwood Creek</b>					
At Peoria Street	-- <sup>1</sup>	2,630	3,880	4,690	6,220
Downstream of Peakview Avenue	-- <sup>1</sup>	2,340	3,410	3,910	4,760
At Easter Avenue	-- <sup>1</sup>	2,070	3,040	3,500	4,220
Downstream of Airport Tributary	-- <sup>1</sup>	1,960	3,430	4,200	5,470
<b>Coyote Run</b>					
At Mouth	28.7	1,750	5,960	8,600	13,600
I-70/US-36	17.0	1,680	4,960	6,940	10,800
Below confluence with Woodrat Gulch	8.5	960	2,840	3,970	6,130
<b>Dutch Creek</b>					
Upstream of Platte Canyon Road	-- <sup>1</sup>	-- <sup>1</sup>	-- <sup>1</sup>	7,400	-- <sup>1</sup>
<b>East Toll Gate Creek</b>					
At Chambers Road	11.05	2,577	4,987	6,384	9,542
At Columbia Creek Tributary	10.75	2,574	5,007	6,409	9,531
At Airport Boulevard	9.71	2,197	4,379	5,592	8,239
At Confluence with East Toll Gate Creek Tributary and Buckley Tributary	9.34	2,146	4,267	5,400	7,922
Approximately 544 feet Upstream of Aspen Boulevard	-- <sup>1</sup>	896	2,001	2,660	5,297
At Jewell Avenue	4.25	625	1,425	1,907	4,590
Approximately 866 feet Upstream of East Jewell Avenue	-- <sup>1</sup>	599	1,371	1,830	4,518
At East Hampden Avenue	2.56	418	797	1,061	3,804
At South Gun Club Road	1.5	390	860	1,250	2,900
At Aurora Parkway	0.3	130	220	270	1,110

<u>Flooding Source/Location</u>	<u>Drainage Area (Square Miles)</u>	<u>Peak Discharges (Cubic Feet per Second)</u>			
		<u>10% Annual Chance</u>	<u>2% Annual Chance</u>	<u>1% Annual Chance</u>	<u>0.2% Annual Chance</u>
<b>First Creek</b>					
Upstream of Smith Road	-- <sup>1</sup>	1,930	-- <sup>1</sup>	4,000	-- <sup>1</sup>
At I-70	11.6	1,230	3,300	4,790	6,750
At 6 <sup>th</sup> Avenue	4.5	450	1,450	1,910	2,810
<b>First Creek Tributary T</b>					
At Picadilly Road	8.1	530	1,770	2,530	4,030
At Harvest Road	2.7	610	1,790	2,510	3,440
<b>Granby Ditch</b>					
At Mouth	3.74	1,800	2,460	2,775	3,450
Above Confluence with Sable Ditch	2.28	935	1,280	1,445	1,800
At Colfax Avenue	1.96	488	876	1,080	1,732
At Laredo Street	1.38	212	372	447	1,170
<b>Goldsmith Gulch</b>					
At Belleview Road	2.6	1,270	1,950	2,250	3,050
<b>West Tributary to Goldsmith Gulch</b>					
At Orchard Road	1.3	530	840	1,000	1,380
<b>Green Acres Tributary</b>					
U/S of Confluence with Happy Canyon Creek	0.19	670	1,183	1,447	1,875
<b>Greenwood Gulch</b>					
At Belleview Road	3.3	1,800	2,550	2,750	3,200
At Confluence with Prentice Creek	2.7	1,700	2,300	2,450	2,800
At Orchard Road	1.2	1,100	1,500	1,600	1,850
<b>Happy Canyon Creek</b>					
U/S of Confluence with Cherry Creek	17.49	3,049	6,970	9,234	13,367
D/S of Jordan Road	17.27	3,049	6,969	9,233	13,359
<b>Havana Tributary</b>					
At confluence with Cottonwood Creek	-- <sup>1</sup>	660	1,080	1,360	1,970
<b>Inverness Tributary</b>					
At confluence with Cottonwood Creek	-- <sup>1</sup>	530	870	1,100	1,610
<b>Lee Gulch</b>					
At Confluence with South Platte River	2.5	1,900	2,500	2,900	4,500
<b>Little's Creek</b>					
Just Upstream of Dry Creek Road	-- <sup>1</sup>	1	145	292	467
Approximately 150 feet upstream of Washington Way	-- <sup>1</sup>	8	164	342	617
Just upstream of Washington Way	-- <sup>1</sup>	46	190	406	726

<u>Flooding Source/Location</u>	<u>Drainage Area (Square Miles)</u>	<u>Peak Discharges (Cubic Feet per Second)</u>			
		<u>10% Annual Chance</u>	<u>2% Annual Chance</u>	<u>1% Annual Chance</u>	<u>0.2% Annual Chance</u>
Little's Creek (Continued)					
Approximately 360 feet downstream of Easter Avenue	-- <sup>1</sup>	85	229	468	814
At Pennsylvania Street	-- <sup>1</sup>	262	484	702	1,115
At Highline Canal	-- <sup>1</sup>	389	619	838	1,258
Just downstream of Highline Canal	-- <sup>1</sup>	426	695	900	1,361
Just upstream of South Broadway	-- <sup>1</sup>	543	833	1,058	1,499
Just downstream of Gallup Street and Peakview Avenue	-- <sup>1</sup>	855	1,498	1,900	2,596
At Confluence with South Platte River	-- <sup>1</sup>	942	1,676	2,256	3,125
Little Dry Creek					
Upstream of Uinta Street	0.73	755	1,317	1,587	2,140
Upstream of Arapahoe Road	1.55	1,113	2,157	2,673	3,725
Holly Dam	2.07	1,183	2,413	3,076	4,330
Clarkson Street	23.66	2,275	3,750	4,580	5,970
Logan Street	-- <sup>1</sup>	2,275 <sup>3</sup>	3,210	3,540	5,960
Cinderella Conduit Entrance	-- <sup>1</sup>	2,350 <sup>3</sup>	3,340	3,660	6,090 <sup>3</sup>
South Platte River Confluence	24.96	2,470 <sup>3</sup>	3,420	3,770	6,200
Lone Tree Creek					
Downstream of Arapahoe Airport Runway	0.31	54	227	259	-- <sup>1</sup>
At Cherry Creek Rec. Area Boundary	1.64	1,085	1,841	2,205	-- <sup>1</sup>
Murphy Creek					
Upstream of the Confluence with Murphy Creek Tributary	0.09	86	154	181	234
Downstream of the Confluence with Murphy Creek Tributary	-- <sup>1</sup>	329	592	704	874
Approximately 1,093 upstream of East Alexander Drive	0.98	624	1,168	1,425	1,838
Approximately 900 feet Upstream of Alameda Avenue	-- <sup>1</sup>	1,032	2,807	4,100	5,329
Above Confluence with Sand Creek	12.6	1,690	4,401	5,912	9,316
Murphy Creek Tributary					
Upstream of the Confluence with Murphy Creek	-- <sup>1</sup>	243	438	525	640
Peoria Tributary					
At confluence with Cottonwood Creek	-- <sup>1</sup>	430	710	880	1,400
Prairie Dog Draw					
At Mouth	6.3	850	2,200	3,020	4,600
Prentice Gulch					
At Mouth	0.8	640	870	920	1,030 <sup>2</sup>

<u>Flooding Source/Location</u>	<u>Drainage Area (Square Miles)</u>	<u>Peak Discharges (Cubic Feet per Second)</u>			
		<u>10% Annual Chance</u>	<u>2% Annual Chance</u>	<u>1% Annual Chance</u>	<u>0.2% Annual Chance</u>
<b>Quincy Gulch</b>					
At Confluence with Blackmer Gulch	0.8	610	810	850	1,000
At South Bellaire Street	0.4	320	420	445	550
<b>Rat Run</b>					
At Mouth	2.9	440	1,120	1,530	2,310
<b>Sable Ditch</b>					
At Upstream Side of I-225	1.45	892	1,601	1,951	3,028
At Jasper Street (Detention Pond Outlet)	0.92	234	492	638	1,288
<b>Sand Creek</b>					
At Confluence with Murphy Creek	101.1	6,640	14,851	19,312	28,316
<b>Second Creek</b>					
At downstream Limit of Study	7.7	870	2,871	4,122	6,035
At 56 <sup>th</sup> Avenue	1.8	291	960	1,356	1,933
<b>Senac Creek</b>					
Upstream of Confluence with Haynes Gulch	0.7	789	1,328	1,560	2,006
Upstream of East Quincy Avenue	7.1	1,333	2,385	2,906	3,880
Downstream of Confluence with Baldwin Creek	8.8	1,847	3,583	4,427	5,987
At East Yale Avenue	9.6	2,002	3,788	4,722	6,475
Upstream of Confluence with Coal Creek	9.8	2,048	3,835	4,782	6,547
<b>Slaughterhouse Gulch</b>					
At Confluence with South Platte River	2.0	1,400	1,700	2,000	2,900
<b>South Tributary to Slaughterhouse Gulch</b>					
At Confluence w/ Slaughterhouse Gulch	.37	438	520	550	720
<b>SJCD 6200</b>					
Upstream of Platte Canyon Road	-- <sup>1</sup>	-- <sup>1</sup>	-- <sup>1</sup>	2,280	-- <sup>1</sup>
<b>South Platte River</b>					
Approximately 100 Feet Downstream of Confluence with Bear Creek	-- <sup>1</sup>	4,900	10,900	14,600	25,000
Just Upstream of Confluence with Bear Creek	-- <sup>1</sup>	4,900	10,300	13,500	23,000
Just Downstream of Confluence with Big Dry Creek	-- <sup>1</sup>	4,300	9,500	12,700	22,000
Approximately 100 Feet Upstream of Confluence with Big Dry Creek	-- <sup>1</sup>	3,300	6,900	8,900	15,000
Approximately 100 Feet Downstream of Confluence with Dutch Creek	-- <sup>1</sup>	2,700	5,000	6,400	10,000
Just Upstream of Confluence with Dutch	-- <sup>1</sup>	1,300	2,200	2,700	4,000

<u>Flooding Source/Location</u> Creek	<u>Drainage Area</u> <u>(Square Miles)</u>	<u>Peak Discharges (Cubic Feet per Second)</u>			
		<u>10%</u> <u>Annual</u> <u>Chance</u>	<u>2%</u> <u>Annual</u> <u>Chance</u>	<u>1%</u> <u>Annual</u> <u>Chance</u>	<u>0.2%</u> <u>Annual</u> <u>Chance</u>
<b>Spring Creek</b>					
At Confluence with Willow Creek	1.25	508	1,177	1,603	3,085
At Mineral Avenue	1.11	489	1,158	1,600	3,085
At County Line Road	0.71	401	907	1,259	2,440
<b>Sterne Parkway Overflow</b>					
250 feet downstream of South Broadway	-- <sup>1</sup>	-- <sup>1</sup>	-- <sup>1</sup>	128	-- <sup>1</sup>
<b>Toll Gate Creek</b>					
At Confluence with Sand Creek	18.48	10,000	22,000	29,000	34,008
Downstream of East 17 <sup>th</sup> Place	-- <sup>1</sup>	8,767	1,7570	22,697	33,419
Upstream of East Coal Fax Avenue	-- <sup>1</sup>	8,745	1,7545	22,676	33,387
At 6 <sup>th</sup> Avenue	-- <sup>1</sup>	8,264	16,762	21,815	30,877
At Confluence with East and West Toll Gate Creeks	12.61	7,965	16,242	21,198	29,934
<b>Toll Gate Creek - I-225 Spill</b>					
Above Confluence with Toll Gate Creek	-- <sup>1</sup>	-- <sup>1</sup>	-- <sup>1</sup>	371	10,909
<b>West Toll Gate Creek</b>					
At Limit of Study	-- <sup>1</sup>	220	445	555	734
Downstream of South Rivera Way	-- <sup>1</sup>	54	221	353	637
Downstream of Picadilly Street	-- <sup>1</sup>	112	484	674	762
Upstream of Himalaya Street	-- <sup>1</sup>	314	577	817	1,096
Upstream of Quincy Reservoir	-- <sup>1</sup>	704	1,383	1,876	2,486
Downstream of Quincy Reservoir	-- <sup>1</sup>	766	1,141	1,409	1,807
Downstream of Hampden Avenue	-- <sup>1</sup>	1,368	2,512	3,085	4,041
Downstream of East Dartmouth Avenue	-- <sup>1</sup>	1,737	3,220	3,972	5,142
Upstream of Confluence with Unnamed Creek	-- <sup>1</sup>	1,969	3,714	4,577	5,857
Approximately 500 feet Downstream of Confluence with Unnamed Creek	-- <sup>1</sup>	3,016	5,867	7,207	9,797
At the Confluence with West Toll Gate Creek Tributary	-- <sup>1</sup>	5,046	10,222	12,763	17,066
Approximately 1,260 feet upstream of Mexico Avenue	-- <sup>1</sup>	5,923	12,121	15,232	20,368
Just downstream of Mexico Avenue	-- <sup>1</sup>	6,141	12,592	15,902	21,265
Just downstream of Mississippi Avenue	-- <sup>1</sup>	5,052	1,127	14,576	19,419
Just downstream of Alameda Parkway	-- <sup>1</sup>	5,210	11,534	14,882	19,812
Approximately 2,100 feet upstream of South Chambers Road	-- <sup>1</sup>	5,210	11,534	14,882	20,165
Approximately 1,340 feet downstream of South Chambers Road	-- <sup>1</sup>	5,523	12,090	15,616	20,703
Approximately 1,200 feet upstream of the confluence with Toll Gate Creek	-- <sup>1</sup>	5,523	13,106	18,351	28,439
At the Confluence with Toll Gate Creek	-- <sup>1</sup>	7,965	16,210	21,140	29,934

<u>Flooding Source/Location</u>	<u>Drainage Area (Square Miles)</u>	<u>Peak Discharges (Cubic Feet per Second)</u>			
		<u>10% Annual Chance</u>	<u>2% Annual Chance</u>	<u>1% Annual Chance</u>	<u>0.2% Annual Chance</u>
West Toll Gate Creek Tributary At Mouth	2.6	610	1,950	3,100	7,400
Unnamed Creek (Tributary to West Toll Gate Creek)					
Upstream of Belleview Detention Pond	-- <sup>1</sup>	596	1,161	1,452	1,915
Just downstream of Copperleaf Boulevard	-- <sup>1</sup>	191	250	523	1,047
Just upstream of Picadilly Street	-- <sup>1</sup>	834	1,567	1,948	2,559
Just downstream of Picadilly Street	-- <sup>1</sup>	399	665	1,083	2,086
Downstream of Quincy Avenue Detention Pond	-- <sup>1</sup>	614	1,256	1,602	2,629
Just downstream of Quincy Avenue	-- <sup>1</sup>	445	785	1,112	2,163
Just upstream of East Hampden Avenue	-- <sup>1</sup>	860	1,684	2,100	2,774
Just downstream of East Hampden Avenue	-- <sup>1</sup>	605	1,258	1,610	2,279
Approximately 1,100 feet downstream of East Hampden Avenue	-- <sup>1</sup>	785	1,642	2,068	2,883
Approximately 2,000 feet upstream of Bates Avenue	-- <sup>1</sup>	991	2,040	2,672	3,470
At Mouth	6.0	1,227	2,475	3,104	4,249
Tributary to Unnamed Creek Upstream of Picadilly Detention Pond	0.6	-- <sup>1</sup>	-- <sup>1</sup>	1,290	-- <sup>1</sup>
Westerly Creek At 14 <sup>th</sup> Avenue	10.8	2,700	4,200	5,000	6,800
At Pond A-B	5.8	400	1,150	1,650	2,650
Willow Creek At Dry Creek Road	-- <sup>1</sup>	3,410	7,000	9,010	12,140
At Quebec Street	-- <sup>1</sup>	2,780	5,410	6,830	9,000
At County Line Road	-- <sup>1</sup>	2,150	3,500	4,240	5,620
Woodrat Gulch At Mouth	3.4	470	1,280	1,780	2,740
Wolf Creek Upstream of Interstate 70	82.2	4,485	10,603	14,686	24,966
At Confluence with Wolf Creek Tributary	71.7	4,278	10,233	14,166	24,082
Wolf Creek Tributary At Mouth	3.5	571	1,185	1,578	2,683

<sup>1</sup>Data not available

<sup>2</sup>No flow at this discharge

<sup>3</sup>Value was extrapolated

### 3.2 Hydraulic Analyses

Analyses of the hydraulic characteristics of flooding from the sources studied were carried out to provide estimates of the elevations of floods of the selected recurrence intervals. Users should be aware that flood elevations shown on the FIRM represent founded whole-foot elevations and may not exactly reflect the elevations shown on the Flood Profiles or in the Floodway Data Table in the FIS report. Flood elevations shown on the FIRM are primarily intended for flood insurance rating purposes. For construction and/or floodplain management purposes, users are cautioned to use the flood elevation data presented in this FIS report in conjunction with the data shown on the FIRM.

Water-surface elevation of floods of the selected recurrence intervals were computed through the use of the COE HEC-2 step-backwater computer program (Reference 38). Starting water-surface elevations for the tributaries of the South Platte River were taken from previously computed stage-discharge relationships when available. In many cases, control elevations were shifted upstream to bridges or culverts. Where no other information or control structures were available, the starting water-surface elevations were computed by the slope-area method option of the HEC-2 program.

Detailed cross section data for Cottonwood Creek, Cherry Creek, Piney Creek, Murphy Creek, Coal Creek, Comanche Creek, Little Comanche Creek, West Bijou Creek, and Box Elder Creek were field surveyed and were located at close intervals above and below culverts in order to compute the effects of backwater. For Little Dry Creek, Big Dry Creek, and Sand Creek, cross sections were taken from detailed topographic maps (References 30 and 34). Detailed mapping of the South Platte River was secured from the COE. The USGS topographic mapping, at a scale of 1:24,000, with a contour interval of 10 feet, was used to supplement field survey data (Reference 29).

Hydraulic analyses included in the Flood Insurance Studies for the incorporated communities of Aurora, Cherry Hills Village, Columbine Valley, Englewood, Greenwood Village, Littleton, and Sheridan were incorporated into the restudy in their entirety with the exception of streams or portions of streams which were superseded by more up-to-date information (References 2, 3, 5 through 9, 88, 89).

Hydraulic analyses for portions of First Creek, Piney Creek, Murphy Creek, Lone Tree Creek, Happy Canyon Creek, Cottonwood Creek, Lee Gulch, and Little Creek were taken from published UDFCD reports (References 10, 11, 12, 13, 14, 15, and 16).

Additional hydraulic analyses from the various engineering reports discussed in Section 7.0 have been incorporated into the Arapahoe County restudy.

Hydraulic analyses for portions of Big Dry Creek Tributary A, East Tributary to West Toll Gate Creek, First Creek, Sampson Gulch, and Senac Creek were

performed using topographic maps at a scale of 1:24,000, with a contour interval of 10 feet (Reference 39). Field surveyed cross sections were used and normal-depth calculations were performed in order to obtain top widths at the selected cross sections. Cross section information for channel geometry and surrounding areas was taken from existing reports (References 40, 41, 42, and 43).

Locations of selected cross sections used in the hydraulic analyses are shown on the Flood Profiles (Exhibit 1). For stream segments for which a floodway was computed (Section 4.2), selected cross section locations are also shown on the Flood Insurance Rate Map (Exhibit 2).

For the approximate studies, floodplain limits were defined by normal-depth calculations in approximate, typical cross sections taken from USGS maps.

The hydraulic analyses for this study were based on unobstructed flow. The flood elevations shown on the profiles are thus considered valid only if hydraulic structures remain unobstructed, operate properly, and do not fail.

### 3.3 Vertical Datum

All FISs and FIRMs are referenced to a specific vertical datum. The vertical datum provides a starting point against which flood, ground, and structure elevations can be referenced and compared. Until recently, the standard vertical datum in use for newly created or revised FIS reports and FIRMs was the National Geodetic Vertical Datum of 1929 (NGVD29). With the finalization of the North American Vertical Datum of 1988 (NAVD88), many FIS reports and FIRMs are being prepared using NAVD88 as the referenced vertical datum.

All flood elevations shown in this FIS report and on the FIRM are referenced to NAVD88. It is important to note that adjacent communities may be referenced to NGVD29. This may result in differences in base flood elevations across the corporate limits between communities.

As noted above, the elevations shown in the FIS report and on the FIRM for Arapahoe County and Incorporated Areas are referenced to NAVD88. Ground, structure, and flood elevations may be compared and/or referenced to NGVD29 by applying a standard conversion factor.

The conversion from NGVD29 to NAVD88 ranged between 2.60 and 3.06 for this county. Accordingly, due to the range in conversion factors, an average conversion factor was established for the entire county. The elevations shown in the FIS report and on the FIRM were, therefore, converted to NAVD88 using a countywide approach in which an average conversion was established for the county. The conversion factor for NGVD29 to NAVD88 of 2.87 feet was used for each flooding source in the community.

The BFEs shown in the FIRM represent whole-foot rounded values. For example, a BFE of 5202.4 will appear as 5202 on the FIRM and 5202.6 will appear as 5203.

Therefore, users who wish to convert the elevations in this FIS to NGVD29 should apply the stated conversion factor to elevations shown on the Flood Profiles and supporting data tables in the FIS report, which are shown at a minimum to the nearest 0.1 foot.

For more information on NAVD88, see the publication entitled, *Converting the National Flood Insurance Program to the North American Vertical Datum of 1988* (FEMA Publication FIA-20/June 1992), or contact the Vertical Network Branch, National Geodetic Survey, Coast and Geodetic Survey, National Oceanic and Atmospheric Administration, Rockville, Maryland 20910 (Internet address <http://www.ngs.noaa.gov>).

Qualifying bench marks within a given jurisdiction that are cataloged by the National Geodetic Survey (NGS) and entered into the National Spatial Reference System (NSRS) as First or Second Order Vertical and have a vertical stability classification of A, B, or C are shown and labeled on the FIRM with their 6-character NSRS Permanent Identifier.

Bench marks catalogued by the NGS and entered into the NSRS vary widely in vertical stability classification. NSRS vertical stability classifications are as follows:

- Stability A: Monuments of the most reliable nature, expected to hold position/elevation well (e.g., mounted in bedrock)
- Stability B: Monuments which generally hold their position/elevation well (e.g., concrete bridge abutments)
- Stability C: Monuments which may be affected by surface ground movements (e.g., concrete monument below frost line)
- Stability D: Mark of questionable or unknown vertical stability (e.g., concrete monument above frost line or steel witness post)

To obtain up-to-date elevation information on NGS bench marks shown on the FIRM, please contact the Information Services Branch of the NGS at (301) 713-3242, or visit their website at [www.ngs.noaa.gov](http://www.ngs.noaa.gov). Map users should seek verification of non-NGS monument elevations when using these elevations for construction or floodplain management purposes.

Temporary vertical monuments are often established during the preparation of a flood hazard analysis for the purpose of establishing local vertical control. Although these monuments are not shown on the FIRM, they may be found in the Technical Support Data Notebook associated with this FIS report and FIRM for this community. Interested individuals may contact FEMA to access this data.

### **3.0 FLOODPLAIN MANAGEMENT APPLICATIONS**

The NFIP encourages State and local governments to adopt sound floodplain management programs. Therefore, each FIS provides 1-percent-annual-chance flood elevations and delineations of the 1- and 0.2-percent-annual-chance floodplain boundaries and 1-percent-annual-chance floodway to assist communities in developing floodplain management measures. This information is presented on the FIRM and in many components of the FIS report, including Flood Profiles, Floodway Data table and Summary of Stillwater Elevations Table. Users should reference the data presented in the FIS report as well as additional information that may be available at the local map repository before making flood elevation and/or floodplain boundary determinations.

#### **4.1 Floodplain Boundaries**

To provide a national standard without regional discrimination, the 1-percent-annual-chance flood has been adopted by FEMA as the base flood for floodplain management purposes. The 0.2-percent-annual-chance flood is employed to indicate additional areas of flood risk in the community. For each stream studied by detailed methods, the 1- and 0.2-percent-annual-chance floodplain boundaries have been delineated using the flood elevations determined at each cross section. Between cross sections, the boundaries were interpolated using topographic maps at scales of 1:24,000; 1:2,400; 1:6,000; and 1:1,200; with contour intervals of 10 and 2 feet (References 34, 35, 40, 42, 43, 47, and 48).

The 1- and 0.2-percent-annual-chance floodplain boundaries are shown on the FIRM (Exhibit 2). On this map, the 1-percent-annual-chance floodplain boundary corresponds to the boundary of the areas of special flood hazards (Zones A, AE, AH, and AO); and the 0.2-percent-annual-chance floodplain boundary of areas of moderate flood hazards. In cases where the 1- and 0.2-percent-annual-chance floodplain boundaries are close together, only the 1-percent-annual-chance floodplain boundary has been shown. Small areas within the floodplain boundaries may lie above the flood elevations but cannot be shown due to limitations of the map scale and/or lack of detailed topographic data.

Approximate 1-percent-annual-chance floodplain boundaries in some portions of the study area were taken directly from the Flood Insurance Rate Map for the Town of Deer Trail, Colorado (Reference 59).

For the streams studied by approximate methods, only the 1-percent-annual-chance floodplain boundary is shown on the FIRM (Exhibit 2).


## 4.2 Floodways

Encroachment on floodplains, such as structures and fill, reduces flood-carrying capacity, increases flood heights and velocities, and increases flood hazards in areas beyond the encroachment itself. One aspect of floodplain management involves balancing the economic gain from floodplain development against the resulting increase in flood hazard. For purposes of the NFIP, a floodway is used as a tool to assist local communities in this aspect of floodplain management. Under this concept, the area of the 1-percent-annual-chance floodplain is divided into a floodway and a floodway fringe. The floodway is the channel of a stream, plus any adjacent floodplain areas, that must be kept free of encroachment so that the 1-percent-annual-chance flood can be carried without substantial increases in flood heights. Minimum Federal standards limit such increases to 1.0 foot, provided that hazardous velocities are not produced. The floodways in this study are presented to local agencies as minimum standards that can be adopted directly or that can be used as a basis for additional floodway studies.

The floodway presented in this FIS report and on the FIRM was computed for certain stream segments on the basis of equal conveyance reduction from each side of the floodplain. Floodway widths were computed at cross sections. Between cross sections, the floodway boundaries were interpolated. The results of the floodway computations have been tabulated for selected cross sections (Table 4). In cases where the floodway and 1-percent-annual-chance floodplain boundaries are either close together or collinear, only the floodway boundary has been shown.

The area between the floodway and 1-percent-annual-chance floodplain boundaries is termed the floodway fringe. The floodway fringe encompasses the portion of the floodplain that could be completely obstructed without increasing the water-surface elevation of the 1-percent-annual-chance flood more than 1.0 foot at any point. Typical relationships between the floodway and the floodway fringe and their significance to floodplain development are shown in Figure 5.

Figure 5 – Floodway Schematic

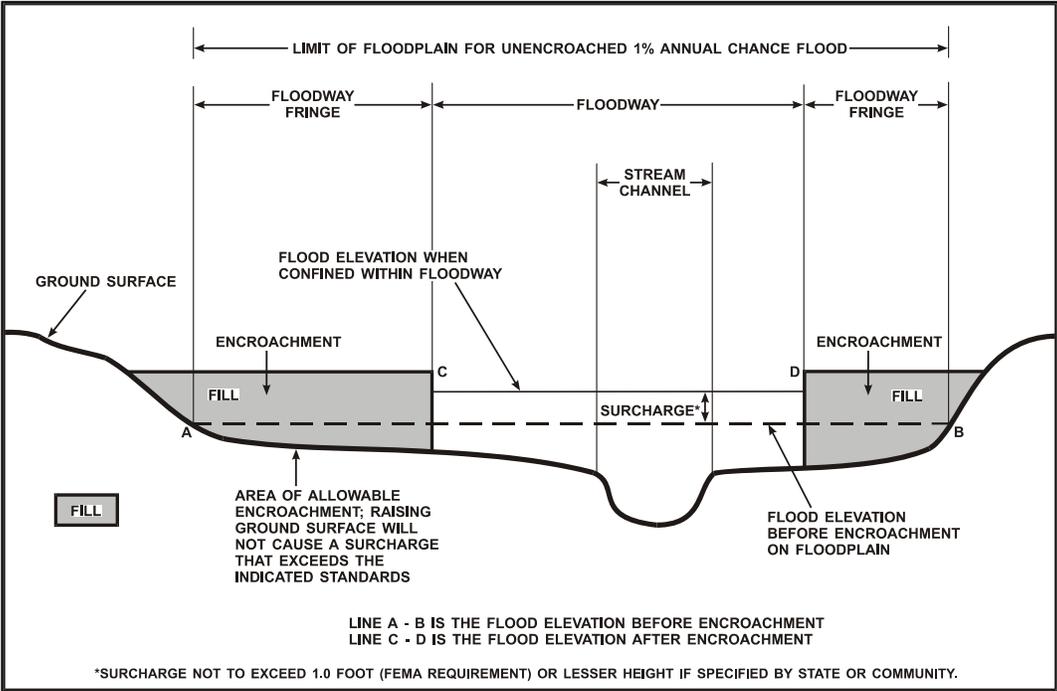

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
CHERRY CREEK								
A	86,110	1,305	8,472	6.0	5,624.3	5,624.3	5,625.1	0.8
B	86,896	792	5,955	8.5	5,627.9	5,627.9	5,628.5	0.6
C	87,257	745	6,003	8.4	5,629.7	5,629.7	5,630.2	0.5
D	88,111	663	5,979	8.3	5,633.3	5,633.3	5,633.8	0.5
E	88,941	1,053	8,487	5.8	5,635.8	5,635.8	5,636.8	1.0
F	89,292	1,087	8,680	5.7	5,636.9	5,636.9	5,637.8	0.9
G	59,802	579	4,638	9.1	5,638.3	5,638.3	5,639.0	0.7
H	90,126	900	7,564	5.5	5,640.6	5,640.6	5,640.8	0.2
I	90,669	920	6,102	6.8	5,641.8	5,641.8	5,642.0	0.2
J	90,939	829	4,804	10.2	5,643.6	5,643.6	5,643.6	0.0
K	91,358	1,371	11,782	4.9	5,650.0	5,650.0	5,650.0	0.0
L	91,576	1,403	9,850	4.9	5,650.3	5,650.3	5,650.3	0.0
M	93,004	2,017	12,984	3.7	5,653.2	5,653.2	5,653.3	0.1
N	95,434	955	5,822	8.3	5,658.8	5,658.8	5,658.9	0.1
O	96,049	819	5,553	8.6	5,661.3	5,661.3	5,661.6	0.3
P	96,762	941	6,730	7.1	5,664.7	5,664.7	5,664.8	0.1
Q	97,310	784	5,702	8.3	5,667.1	5,667.1	5,667.1	0.0
R	97,989	712	5,599	8.4	5,670.0	5,670.0	5,670.1	0.1
S	98,604	857	7,288	6.5	5,672.4	5,672.4	5,672.5	0.1
T	99,598	705	6,089	7.7	5,675.7	5,675.7	5,676.0	0.3
U	100,260	807	5,405	8.6	5,681.9	5,681.9	5,681.9	0.0
V	101,250	716	7,736	6.5	5,685.6	5,685.6	5,685.6	0.0
W	102,371	1,291	7,189	6.4	5,689.4	5,689.4	5,689.5	0.1
X	103,222	1,237	6,231	7.3	5,692.8	5,692.8	5,693.0	0.2

<sup>1</sup> Feet Above Confluence With South Platte River

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**CHERRY CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
CHERRY CREEK (Continued)								
Y	104,066	1,020	7,023	6.4	5,696.1	5,696.1	5,696.3	0.2
Z	104,643	744	4,979	9.1	5,697.1	5,697.1	5,697.5	0.4
AA	105,301	865	6,182	7.3	5,700.4	5,700.4	5,700.8	0.4
AB	105,994	757	5,312	8.4	5,702.9	5,702.9	5,703.2	0.3
AC	107,060	881	6,888	6.5	5,707.3	5,707.3	5,707.3	0.0
AD	108,492	1,071	7,528	5.8	5,710.7	5,710.7	5,711.0	0.3
AE	109,251	1,057	7,502	5.9	5,712.5	5,712.5	5,712.7	0.2

<sup>1</sup> Feet Above Confluence With South Platte River

**TABLE 5**

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

**FLOODWAY DATA**

**CHERRY CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
COAL CREEK								
A	1,349	690	4,515	3.2	5,496.8	5,496.8	5,497.2	0.0
B	2,810	1,169	3,444	3.9	5,506.1	5,506.1	5,506.5	0.4
C	5,299	711	2,315	7.3	5,516.6	5,516.6	5,516.6	0.0
D	7,922	523	2,535	6.7	5,530.8	5,530.8	5,531.0	0.2
E	8,989	703	2,490	6.8	5,536.9	5,536.9	5,537.1	0.2
F	10,500	536	2,691	6.3	5,542.3	5,542.3	5,542.7	0.4
G	12,553	536	3,078	5.5	5,552.4	5,552.4	5,552.8	0.4
H	13,148	452	3,216	5.3	5,556.2	5,556.2	5,556.6	0.4
I	13,913	436	2,526	6.7	5,557.7	5,557.7	5,558.1	0.4
J	15,267	304	2,658	6.4	5,564.3	5,564.3	5,564.3	0.0
K	16,694	409	2,580	6.6	5,569.6	5,569.6	5,570.1	0.5
L	18,847	470	1,951	8.7	5,575.5	5,575.5	5,575.5	0.0
M	18,928	489	2,414	7.0	5,581.6	5,581.6	5,581.9	0.3
N	20,051	695	2,716	6.3	5,586.7	5,586.7	5,587.0	0.3
O	21,482	309	2,083	8.2	5,593.8	5,593.8	5,594.2	0.4
P	22,412	602	2,436	7.0	5,598.5	5,598.5	5,599.0	0.5
Q	24,366	367	2,258	7.5	5,606.1	5,606.1	5,606.4	0.3
R	26,327	390	2,694	6.3	5,614.8	5,614.8	5,615.2	0.4
S	26,636	497	3,064	5.5	5,616.1	5,616.1	5,616.5	0.4
T	27,278	545	5,291	3.2	5,621.4	5,621.4	5,621.7	0.3
U	28,131	534	4,328	3.9	5,621.7	5,621.7	5,622.2	0.5
V	23,012	285	1,580	10.7	5,623.4	5,623.4	5,623.5	0.1
W	29,729	664	2,314	7.3	5,629.4	5,629.4	5,629.7	0.3
X	30,676	358	1,760	9.6	5,634.2	5,634.2	5,634.4	0.2
Y	31,256	425	2,412	6.2	5,637.6	5,637.6	5,638.0	0.4
Z	32,524	890	2,675	5.6	5,644.7	5,644.7	5,644.7	0.0

<sup>1</sup> Feet Above Confluence with Sand Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO  
AND INCORPORATED AREAS**

FLOODWAY DATA

**COAL CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
COAL CREEK								
AA	33,763	389	1,769	8.5	5,651.5	5,651.5	5,651.5	0.0
AB	34,373	655	2,531	5.9	5,656.3	5,656.3	5,656.7	0.4
AC	34,766	687	3,118	4.8	5,658.3	5,658.3	5,658.7	0.4
AD	36,166	405	1,789	8.1	5,663.0	5,663.0	5,663.3	0.3
AE	37,251	363	2,047	7.0	5,670.4	5,670.4	5,670.4	0.0
AF	37,709	293	1,555	9.3	5,671.7	5,671.7	5,672.0	0.3
AG	38,865	375	1,977	7.3	5,676.3	5,676.6	5,676.6	0.0
AH	40,291	336	2,095	6.9	5,689.0	5,689.0	5,689.0	0.0

<sup>1</sup> Feet Above Confluence with Sand Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO  
AND INCORPORATED AREAS**

FLOODWAY DATA

**COAL CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
East Toll Gate Creek								
A	1,882	268	1,159	5.5	5,416.9	5,416.9	5,416.9	0.0
B	2,871	143	613	10.4	5,421.3	5,421.3	5,421.3	0.0
C	4,054	113	588	10.9	5,426.9	5,426.9	5,426.9	0.0
D	4,865	335	1,234	5.2	5,434.6	5,434.6	5,434.6	0.0
E	5,607	400	2,080	3.1	5,436.1	5,436.1	5,436.1	0.0
F	6,632	137	567	11.3	5,443.0	5,443.0	5,443.0	0.0
G	7,163	258	1,125	5.7	5,447.0	5,447.0	5,447.0	0.0
H	8,031	314	1,011	6.3	5,448.3	5,448.3	5,448.3	0.0
I	9,310	339	1,111	5.0	5,453.0	5,453.0	5,453.0	0.0
J	11,992	217	731	7.9	5,475.2	5,475.2	5,475.2	0.0
K	13,029	210	665	8.1	5,479.7	5,479.7	5,479.7	0.0
L	14,667	334	1,191	4.5	5,488.9	5,488.9	5,489.0	0.1
M	15,213	215	587	9.2	5,491.5	5,491.5	5,492.0	0.5
N	16,176	334	766	6.2	5,497.2	5,497.2	5,497.6	0.4
O	17,656	120	350	7.6	5,507.5	5,507.5	5,508.0	0.5
P	18,346	45	286	9.4	5,511.4	5,511.4	5,511.8	0.4
Q	19,273	148	287	9.3	5,518.1	5,518.1	5,518.1	0.0
R	20,312	155	816	3.3	5,529.8	5,529.8	5,529.8	0.0
S	21,833	86	298	8.7	5,533.5	5,533.5	5,533.5	0.0
T	24,040	104	419	5.4	5,547.1	5,547.1	5,547.3	0.2
U	25,022	94	506	4.5	5,553.1	5,553.1	5,553.5	0.4
V	26,172	93	287	7.9	5,561.1	5,561.1	5,561.1	0.0
W	27,157	101	253	9.0	5,567.0	5,567.0	5,567.0	0.0
X	28,235	128	413	5.2	5,574.8	5,574.8	5,574.8	0.0

<sup>1</sup> Feet above confluence with Toll Gate Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**EAST TOLL GATE CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
East Toll Gate Creek Continued								
Y	29,548	74	349	5.6	5,581.0	5,581.0	5,581.0	0.0
Z	30,395	54	186	10.6	5,584.2	5,584.2	5,584.2	0.0
AA	31,252	48	180	10.9	5,592.7	5,592.7	5,592.7	0.0
AB	32,211	206	409	4.8	5,608.1	5,608.1	5,608.4	0.3
AC	33,011	265	502	3.8	5,615.5	5,615.5	5,615.5	0.0
AD	34,217	287	492	3.9	5,621.7	5,621.7	5,621.7	0.0
AE	35,116	323	900	2.0	5,630.2	5,630.2	5,630.2	0.0
AF	36,499	148	316	5.1	5,636.8	5,636.8	5,636.8	0.0
AG	37,676	199	382	4.2	5,643.2	5,643.2	5,643.2	0.0
AH	38,723	480	425	3.8	5,658.3	5,658.3	5,658.3	0.0
AI	39,680	144	415	3.7	5,661.2	5,661.2	5,661.2	0.0
AJ	40,546	227	848	1.7	5,671.4	5,671.4	5,671.4	0.0
AK	41,489	139	327	4.2	5,676.8	5,676.8	5,676.8	0.0
AL	42,120	134	266	5.1	5,683.1	5,683.1	5,683.1	0.0
AM	42,966	138	274	4.6	5,690.3	5,690.3	5,690.3	0.0
AN	44,034	209	214	5.9	5,697.3	5,697.3	5,697.3	0.0
AO	45,228	296	394	3.2	5,703.4	5,703.4	5,703.4	0.0
AP	46,345	220	307	4.1	5,710.4	5,710.4	5,710.4	0.0
AQ	47,604	390	424	2.5	5,722.1	5,722.1	5,722.1	0.0
AR	48,490	238	311	3.4	5,727.8	5,727.8	5,727.8	0.0
AS	49,159	240	326	3.3	5,732.5	5,732.5	5,732.5	0.0
AT	49,571	148	220	4.8	5,736.5	5,736.5	5,737.0	0.5
AU	50,708	180	223	4.1	5,747.8	5,747.8	5,747.8	0.0

<sup>1</sup> Feet above confluence with Toll Gate Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**EAST TOLL GATE CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
East Toll Gate Creek Continued								
AV	51,759	100	217	4.2	5,755.2	5,755.2	5,755.4	0.2
AW	52,859	92	241	3.8	5,765.7	5,765.7	5,766.1	0.4
AX	54,059	65	189	4.8	5,773.7	5,773.7	5,774.1	0.4
AY	55,340	76	168	5.3	5,782.3	5,782.3	5,782.5	0.2
AZ	56,859	39	113	7.9	5,798.1	5,798.1	5,798.1	0.0
BA	58,359	592	4,895	0.3	5,822.8	5,822.8	5,822.8	0.0
BB	59,331	147	205	5.8	5,826.7	5,826.7	5,826.8	0.1
BC	60,659	77	180	6.7	5,834.7	5,834.7	5,835.0	0.3
BD	61,759	51	170	6.7	5,843.3	5,843.3	5,843.5	0.2
BE	62,909	140	185	6.2	5,854.7	5,854.7	5,854.7	0.0
BF	64,059	95	378	6.6	5,866.8	5,866.8	5,866.8	0.0
BG	65,209	58	122	8.1	5,878.0	5,878.0	5,878.2	0.2
BH	65,809	179	470	1.6	5,887.4	5,887.4	5,887.4	0.0
BI	67,159	54	100	7.6	5,901.5	5,901.5	5,901.9	0.4
BJ	68,359	101	89	3.0	5,918.6	5,918.6	5,918.8	0.2
BK	69,259	37	79	7.5	5,932.2	5,932.2	5,932.2	0.0
BL	69,640	35	77	7.7	5,938.6	5,938.6	5,938.6	0.0
BM	69,884	29	49	7.1	5,941.5	5,941.5	5,941.5	0.0
BN	70,759	36	73	3.7	5,950.6	5,950.6	5,950.6	0.0
BO	71,409	37	39	5.8	5,962.4	5,962.4	5,962.9	0.5

<sup>1</sup> Feet above confluence with Toll Gate Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**EAST TOLL GATE CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
Happy Canyon Creek								
A	386	354	2,567	5.0	5,687.3	5,687.3	5,687.3	0.0
B	1,200	186	997	9.3	5,692.0	5,692.0	5,692.0	0.0
C	2,248	169	934	9.9	5,697.5	5,697.5	5,697.5	0.0
D	3,287	176	976	8.7	5,718.8	5,718.8	5,718.9	0.1
E	4,200	170	836	10.2	5,723.9	5,723.9	5,723.9	0.0

<sup>1</sup> Feet above confluence with Cherry Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**HAPPY CANYON CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
Little's Creek								
A	191	90	302	7.5	5320.7	5320.7	5320.8	0.1
B	727	115	540	4.2	5323.5	5323.5	5323.9	0.4
C	1,080	49	207	10.9	5329.4	5329.4	5329.5	0.1
D	1,299	58	466	4.8	5334.6	5334.6	5334.9	0.3
E	1,714	47	334	6.8	5338.2	5338.2	5338.3	0.1
F	2,180	43	284	7.9	5341.6	5341.6	5341.6	0.0
G	2,663	46	388	5.8	5350.6	5350.6	5350.6	0.0
H	3,284	161	816	2.3	5369.8	5369.8	5370.1	0.3
I	3,758	280	1,175	1.6	5374.4	5374.4	5374.6	0.2
J	3,875	365	2,189	0.9	5374.5	5374.5	5374.7	0.2
K	4,437	220	423	4.5	5377.0	5377.0	5377.1	0.1
L	5,281	102	231	8.2	5384.0	5384.0	5384.1	0.1
M	6,099	256	502	3.8	5391.7	5391.7	5391.7	0.0
N	6,541	77	204	9.3	5392.7	5392.7	5392.8	0.1
O	6,977	81	216	8.8	5395.7	5395.7	5395.8	0.1
P	7,408	93	218	8.7	5398.7	5398.7	5398.8	0.1
Q	7,790	98	223	8.5	5403.2	5403.2	5403.4	0.2
R	8,322	166	469	4.1	5408.5	5408.5	5409.0	0.5
S	8,852	133	321	5.9	5411.0	5411.0	5411.2	0.2
T	9,264	73	231	8.2	5414.9	5414.9	5415.2	0.3
U	9,610	118	586	3.2	5419.9	5419.9	5420.2	0.3
V	10,049	110	304	6.3	5421.9	5421.9	5422.2	0.3
W	10,562	72	270	3.9	5425.2	5425.2	5425.5	0.3
X	11,017	83	197	5.4	5428.4	5428.4	5428.4	0.0
Y	11,442	65	175	6.1	5432.8	5432.8	5432.9	0.1
Z	11,904	24	102	10.4	5438.2	5438.2	5438.4	0.2

<sup>1</sup> Feet above confluence with the South Platte River

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**LITTLES CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
Little's Creek								
A	191	90	302	7.5	5320.7	5320.7	5320.8	0.1
B	727	115	540	4.2	5323.5	5323.5	5323.9	0.4
C	1,080	49	207	10.9	5329.4	5329.4	5329.5	0.1
D	1,299	58	466	4.8	5334.6	5334.6	5334.9	0.3
E	1,714	47	334	6.8	5338.2	5338.2	5338.3	0.1
F	2,180	43	284	7.9	5341.6	5341.6	5341.6	0.0
G	2,663	46	388	5.8	5350.6	5350.6	5350.6	0.0
H	3,284	161	816	2.3	5369.8	5369.8	5370.1	0.3
I	3,758	280	1,175	1.6	5374.4	5374.4	5374.6	0.2
J	3,875	365	2,189	0.9	5374.5	5374.5	5374.7	0.2
K	4,437	220	423	4.5	5377.0	5377.0	5377.1	0.1
L	5,281	102	231	8.2	5384.0	5384.0	5384.1	0.1
M	6,099	256	502	3.8	5391.7	5391.7	5391.7	0.0
N	6,541	77	204	9.3	5392.7	5392.7	5392.8	0.1
O	6,977	81	216	8.8	5395.7	5395.7	5395.8	0.1
P	7,408	93	218	8.7	5398.7	5398.7	5398.8	0.1
Q	7,790	98	223	8.5	5403.2	5403.2	5403.4	0.2
R	8,322	166	469	4.1	5408.5	5408.5	5409.0	0.5
S	8,852	133	321	5.9	5411.0	5411.0	5411.2	0.2
T	9,264	73	231	8.2	5414.9	5414.9	5415.2	0.3
U	9,610	118	586	3.2	5419.9	5419.9	5420.2	0.3
V	10,049	110	304	6.3	5421.9	5421.9	5422.2	0.3
W	10,562	72	270	3.9	5425.2	5425.2	5425.5	0.3
X	11,017	83	197	5.4	5428.4	5428.4	5428.4	0.0
Y	11,442	65	175	6.1	5432.8	5432.8	5432.9	0.1
Z	11,904	24	102	10.4	5438.2	5438.2	5438.4	0.2

<sup>1</sup> Feet above confluence with the South Platte River

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**LITTLES CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
MURPHY CREEK								
A	2,126	561	1,536	4.6	5,506.3	5,506.3	5,506.8	0.5
B	5,479	560	1,212	3.7	5,517.2	5,517.2	5,517.6	0.4
C	5,798	298	617	6.7	5,518.6	5,518.6	5,519.0	0.4
D	6,472	1,265	1,455	2.8	5,522.2	5,522.2	5,522.5	0.3
E	6,684	1,291	2,229	1.8	5,523.5	5,523.5	5,523.7	0.2
F	6,995	435	732	5.6	5,524.1	5,524.1	5,524.4	0.3
G	7,608	237	594	6.9	5,527.8	5,527.8	5,527.9	0.1
H	9,032	208	569	7.2	5,533.5	5,533.5	5,534.2	0.7
I	9,545	245	872	4.7	5,536.6	5,536.6	5,537.0	0.4
J	10,211	10,211	585	7.0	5,539.9	5,539.9	5,540.1	0.2
K	10,586	10,586	770	5.3	5,542.9	5,542.9	5,543.4	0.5
L	11,008	11,008	559	7.3	5,545.1	5,545.1	5,545.6	0.5
M	11,300	11,300	1,571	2.6	5,552.0	5,552.0	5,552.0	0.0
N	11,666	11,666	1,017	4.0	5,552.0	5,552.0	5,552.0	0.0
O	11,837	11,837	495	8.3	5,552.9	5,552.9	5,552.9	0.0
P	12,313	12,313	637	6.4	5,555.9	5,555.9	5,556.1	0.2
Q	13,366	13,366	895	4.6	5,560.3	5,560.3	5,560.5	0.2
R	13,968	13,968	685	5.2	5,562.7	5,562.7	5,563.4	0.7
S	14,650	14,650	837	4.2	5,567.2	5,567.2	5,567.7	0.5
T	15,062	15,062	499	7.1	5,568.7	5,568.7	5,569.0	0.3
U	15,377	15,377	625	5.7	5,572.9	5,572.9	5,572.7	-0.2
V	15,755	15,755	396	9.0	5,573.7	5,573.7	5,573.8	0.1
W	15,808	15,808	877	4.0	5,576.2	5,576.2	5,576.5	0.3
X	16,080	356	389	9.0	5,577.1	5,577.1	5,577.2	0.1
Y	16,367	120	687	5.4	5,578.8	5,578.8	5,578.8	0.0
Z	16,640	136	949	3.9	5,579.3	5,579.3	5,579.3	0.0

<sup>1</sup> Feet above confluence with Coal Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**MURPHY CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
SABLE DITCH								
A	257	78	209	9.3	5,342.1	5,342.1	5,342.1	0.0
B	801	63	276	4.1	5,346.4	5,346.4	5,346.4	0.0
C	1,426	30	107	10.7	5,348.7	5,348.7	5,348.7	0.0
D	2,051	33	110	10.4	5,356.0	5,356.0	5,356.0	0.0
E	2,576	28	103	10.9	5,364.0	5,364.0	5,364.0	0.0
F	3,101	27	103	10.9	5,373.7	5,373.7	5,373.7	0.0
G	3,476	44	219	5.1	5,377.8	5,377.8	5,377.8	0.0
H	3,826	53	254	4.4	5,379.7	5,379.7	5,379.7	0.0
I	4,301	27	92	10.5	5,381.7	5,381.7	5,381.7	0.0
J	4,626	29	146	6.6	5,385.3	5,385.3	5,385.3	0.0
K	5,126	27	86	10.0	5,388.9	5,388.9	5,388.9	0.0
L	5,526	30	153	5.6	5,392.9	5,392.9	5,392.9	0.0
M	6,076	32	159	5.7	5,396.8	5,396.8	5,396.8	0.0
N	6,801	45	132	5.6	5,409.0	5,409.0	5,409.0	0.0
O	7,201	29	140	6.8	5,410.3	5,410.3	5,410.3	0.0
P	7,776	28	109	5.3	5,414.1	5,414.1	5,414.1	0.0
Q	8,251	27	104	6.2	5,415.7	5,415.7	5,415.7	0.0
R	8,651	39	156	4.5	5,418.5	5,418.5	5,418.5	0.0
S	9,514	30	198	3.2	5,422.3	5,422.3	5,422.3	0.0

<sup>1</sup> Stream Distance In Feet Above Confluence With Toll Gate Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY

**ARAPAHOE COUNTY, CO  
AND INCORPORATED AREAS**

**FLOODWAY DATA**

**SABLE DITCH**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
SAND CREEK								
A	36,760	764	4,492	6.5	5,299.5	5,299.5	5,299.6	0.1
B	39,549	370	4,636	7.9	5,314.3	5,314.3	5,314.3	0.0
C	41,346	491	5,748	8.9	5,320.5	5,320.5	5,320.5	0.0
D	42,396	560	5,554	5.2	5,325.0	5,325.0	5,325.0	0.0
E	43,126	160	1,563	13.8	5,327.9	5,327.9	5,327.9	0.0
F	46,390	176	1,620	13.3	5,347.6	5,347.6	5,347.6	0.0
G	47,670	206	2,305	9.3	5,353.8	5,353.8	5,353.8	0.0
H	48,970	344	2,184	9.8	5,365.6	5,365.6	5,365.6	0.0
I	50,175	157	1,604	13.4	5,373.6	5,373.6	5,373.6	0.0
J	51,785	312	3,191	6.7	5,383.0	5,383.0	5,383.5	0.5
K	52,890	368	2,161	10.0	5,386.7	5,386.7	5,387.3	0.6
L	56,928	419	4,144	5.2	5,400.4	5,400.4	5,400.4	0.0
M	58,489	223	2,490	8.6	5,412.2	5,412.2	5,412.2	0.0
N	61,203	192	3,338	6.4	5,427.5	5,427.5	5,427.5	0.0
O	63,263	554	3,339	5.8	5,437.1	5,437.1	5,437.5	0.4
P	64,638	379	2,501	7.7	5,440.7	5,440.7	5,441.0	0.3
Q	65,623	776	6,193	3.1	5,443.2	5,443.2	5,443.7	0.5
R	66,491	376	2,601	7.4	5,446.2	5,446.2	5,446.6	0.4
S	68,296	257	2,441	7.9	5,457.0	5,457.0	5,457.4	0.4
T	68,788	309	3,311	5.8	5,459.9	5,459.9	5,460.3	0.4
U	69,698	460	4,112	4.7	5,463.4	5,463.4	5,463.9	0.5
V	70,679	854	4,201	4.6	5,465.9	5,465.9	5,466.4	0.5
W	72,898	890	3,817	5.1	5,476.5	5,476.5	5,477.0	0.5
X	76,013	850	4,762	4.1	5,490.5	5,490.5	5,490.8	0.3

<sup>1</sup> Feet Above Mouth

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**SAND CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
						(FEET NAVD)		
Senac Creek								
A	820	148	559	8.6	5,642.5	5,642.5	5,642.9	0.4
B	1,331	183	725	6.5	5,646.9	5,646.9	5,647.4	0.5
C	2,181	159	747	6.3	5,651.1	5,651.1	5,651.1	0.0
D	2,830	109	595	7.9	5,654.7	5,654.7	5,655.0	0.3
E	3,794	183	876	5.4	5,663.6	5,663.6	5,664.0	0.4
F	4,714	260	1,046	4.5	5,667.6	5,667.6	5,668.1	0.5
G	5,461	306	674	6.6	5,670.9	5,670.9	5,671.3	0.4
H	6,192	255	725	6.1	5,674.8	5,674.8	5,675.3	0.5
I	6,908	117	1,115	8.6	5,680.9	5,680.9	5,681.0	0.1
J	7,354	564	946	4.7	5,685.2	5,685.2	5,685.5	0.3
K	8,030	408	867	5.1	5,693.5	5,693.5	5,693.9	0.4
L	8,656	333	624	7.1	5,701.4	5,701.4	5,701.7	0.3
M	9,511	347	866	5.1	5,706.8	5,706.8	5,707.2	0.4
N	10,163	753	1,089	4.1	5,711.2	5,711.2	5,711.3	0.1
O	11,039	355	862	3.4	5,717.3	5,717.3	5,717.8	0.5
P	11,593	458	602	4.8	5,721.1	5,721.1	5,721.3	0.2
Q	11,646	455	1,497	1.9	5,724.0	5,724.0	5,724.3	0.3
R	12,354	377	938	3.1	5,724.7	5,724.7	5,725.1	0.4
S	13,118	380	903	3.2	5,730.0	5,730.0	5,730.2	0.2
T	13,709	335	485	6.0	5,733.2	5,733.2	5,733.4	0.2
U	14,363	251	629	4.6	5,737.6	5,737.6	5,737.9	0.3
V	15,413	330	691	4.2	5,743.3	5,743.3	5,743.7	0.4
W	16,413	241	385	7.5	5,747.7	5,747.7	5,747.9	0.2
X	16,913	218	661	4.4	5,752.1	5,752.1	5,752.5	0.4
Y	17,615	138	712	4.1	5,757.0	5,757.0	5,757.2	0.2
Z	17,937	159	1,177	2.5	5,764.1	5,764.1	5,764.1	0.0

<sup>1</sup> Stream distance in feet above confluence with Coal Creek

**TABLE 5**

**FEDERAL EMERGENCY MANAGEMENT AGENCY  
ARAPAHOE COUNTY, CO  
AND INCORPORATED AREAS**

**FLOODWAY DATA**

**SENAC CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER SURFACE ELEVATION			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY (FEET NAVD)	WITH FLOODWAY (FEET NAVD)	INCREASE
Senac Creek								
AA	18,658	95	418	3.7	5,764.5	5,764.5	5,764.5	0.0
AB	19,413	63	277	4.3	5,768.0	5,768.0	5,768.5	0.5
AC	20,413	46	233	5.1	5,775.1	5,775.1	5,775.5	0.4
AD	20,942	71	274	4.3	5,777.7	5,777.7	5,778.2	0.5
AE	21,495	63	273	4.3	5,781.6	5,781.6	5,781.8	0.2
AF	22,413	102	312	3.8	5,787.2	5,787.2	5,787.7	0.5
AG	23,413	46	169	7.0	5,792.6	5,792.6	5,792.7	0.1
AH	24,036	37	118	4.7	5,795.9	5,795.9	5,796.1	0.2
AI	25,408	25	88	6.3	5,804.4	5,804.4	5,804.8	0.4

<sup>1</sup> Stream distance in feet above confluence with Coal Creek

**TABLE 5**

**FEDERAL EMERGENCY MANAGEMENT AGENCY  
ARAPAHOE COUNTY, CO  
AND INCORPORATED AREAS**

**FLOODWAY DATA**

**SENAC CREEK**

LOCATION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
A	482	201	1,885	12.4	5,326.5 <sup>2</sup>	5,323.0	5,323.0	0.0
B	739	199	1,958	11.9	5,329.2	5,329.2	5,329.2	0.0
C	1,408	219	1,773	13.2	5,331.5	5,331.5	5,331.5	0.0
D	1,925	208	2,387	9.8	5,334.4	5,334.4	5,334.4	0.0
E	2,589	191	2,087	11.2	5,335.6	5,335.6	5,335.6	0.0
F	3,162	231	2,632	8.6	5,337.6	5,337.6	5,337.6	0.0
G	4,059	136	1,283	17.7	5,340.1	5,340.1	5,340.1	0.0
H	4,677	145	1,504	15.1	5,344.9	5,344.9	5,344.9	0.0
I	5,094	139	1,304	17.4	5,346.8	5,346.8	5,346.8	0.0
J	5,885	144	1,553	14.6	5,352.1	5,352.1	5,352.1	0.0
K	6,362	178	1,818	12.5	5,357.6	5,357.6	5,357.6	0.0
L	7,156	169	1,995	11.9	5,361.8	5,361.8	5,361.8	0.0
M	7,726	134	1,702	13.3	5,369.3	5,369.3	5,369.3	0.0
N	8,205	144	1,738	12.8	5,371.8	5,371.8	5,371.8	0.0
O	8,760	140	1,696	13.1	5,373.5	5,373.5	5,373.5	0.0
P	9,383	440	2,783	7.9	5,380.2	5,380.2	5,380.2	0.0
Q	10,079	197	1,749	12.6	5,381.0	5,381.0	5,381.0	0.0
R	10,672	162	2,094	11.0	5,385.3	5,385.3	5,385.3	0.0
S	11,270	732	4,225	5.2	5,387.5	5,387.5	5,387.5	0.0
T	11,729	1,002	5,274	4.1	5,388.0	5,388.0	5,388.0	0.0
U	12,373	958	2,839	7.7	5,388.0	5,388.0	5,388.0	0.0

<sup>1</sup> FEET ABOVE CONFLUENCE WITH SAND CREEK

<sup>2</sup> ELEVATION DUE TO BACKWATER FROM SAND CREEK

**TABLE 5**

FEDERAL EMERGENCY MANAGEMENT AGENCY

**ARAPAHOE COUNTY, CO**

AND INCORPORATED AREAS

**FLOODWAY DATA**

**TOLL GATE CREEK**

LOCATION		FLOODWAY			1% ANNUAL CHANCE FLOOD WATER SURFACE ELEVATION (FEET NAVD88)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQ. FEET)	MEAN VELOCITY (FEET/SEC)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
V	13,086	165	1,894	11.5	5,389.7	5,389.7	5,389.7	0.0
W	13,731	247	2,157	10.1	5,391.7	5,391.7	5,391.7	0.0
X	14,327	150	1,653	13.2	5,392.6	5,392.6	5,392.7	0.1
Y	14,949	158	1,790	12.3	5,398.3	5,398.3	5,398.3	0.0
Z	16,703	230	1,657	12.8	5,404.7	5,404.7	5,404.7	0.0
AA	17,775	773	3,188	6.7	5,410.1	5,410.1	5,410.1	0.0

<sup>1</sup> FEET ABOVE CONFLUENCE WITH SAND CREEK

**TABLE 5**

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
 AND INCORPORATED AREAS

**FLOODWAY DATA**

**TOLL GATE CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
UNNAMED CREEK								
A	1,798	140	580	4.6	5,575.0	5,575.0	5,575.0	0.0
B	2,775	269	661	4.0	5,576.7	5,576.7	5,576.7	0.0
C	3,566	56	232	11.5	5,589.0	5,589.0	5,589.1	0.1
D	4,385	177	756	3.5	5,593.4	5,593.4	5,593.4	0.0
E	5,376	245	488	5.5	5,605.9	5,605.9	5,605.9	0.0
F	6,917	363	524	3.9	5,615.3	5,615.3	5,615.3	0.0
G	8,310	174	320	6.5	5,625.4	5,625.4	5,625.4	0.0
H	8,934	282	416	5.0	5,630.2	5,630.2	5,630.2	0.0
I	10,964	208	282	5.7	5,645.1	5,645.1	5,645.1	0.0
J	11,935	348	1,960	0.6	5,657.3	5,657.3	5,657.3	0.0
K	14,538	360	311	3.6	5,680.5	5,680.5	5,680.5	0.0
L	15,346	70	148	7.5	5,685.2	5,685.2	5,685.2	0.0
M	16,629	179	281	4.0	5,700.4	5,700.4	5,700.4	0.0
N	17,909	584	3,971	0.3	5,720.5	5,720.5	5,720.5	0.0
O	19,406	156	330	3.3	5,723.1	5,723.1	5,723.1	0.0
P	22,299	191	1,192	0.4	5,757.1	5,757.1	5,757.1	0.0
Q	24,184	116	99	5.3	5,783.0	5,783.0	5,783.0	0.0
R	25,578	131	774	1.9	5,805.9	5,805.9	5,805.9	0.0
S	26,442	78	178	8.2	5,823.4	5,823.4	5,823.5	0.1
T	27,862	65	170	8.5	5,858.2	5,858.2	5,858.3	0.1
U	28,579	56	161	9.1	5,878.2	5,878.2	5,878.3	0.1

<sup>1</sup> Feet above confluence with West Toll Gate Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**UNNAMED CREEK**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
West Toll Gate Creek Lower Reach								
A	18,527	1,158	4,579	4.6	5,411.5	5,411.5	5,411.5	0.0
B	19,062	465	2,056	8.9	5,414.7	5,414.7	5,414.7	0.0
C	20,093	659	4,121	4.3	5,418.7	5,418.7	5,418.7	0.0
D	21,570	406	2,798	5.3	5,422.5	5,422.5	5,422.5	0.0
E	22,015	172	1,427	10.4	5,424.4	5,424.4	5,424.4	0.0
F	23,213	470	2,997	5.0	5,434.5	5,434.5	5,434.5	0.0
G	24,918	147	1,106	13.5	5,439.3	5,439.3	5,439.3	0.0
J	26,358	213	2,091	7.0	5,448.7	5,448.7	5,448.9	0.2
I	27,993	271	2,247	6.5	5,459.6	5,459.6	5,459.6	0.0
J	29,477	280	2,068	7.1	5,469.1	5,469.1	5,469.1	0.0
K	30,251	269	1,871	7.8	5,471.1	5,471.1	5,471.1	0.0
L	30,856	201	1,936	8.2	5,480.6	5,480.6	5,480.6	0.0
M	31,252	225	2,136	7.5	5,481.6	5,481.6	5,481.6	0.0
N	32,630	227	2,236	7.1	5,483.5	5,483.5	5,483.5	0.0
O	34,118	246	2,703	5.9	5,485.7	5,485.7	5,485.7	0.0
P	34,336	151	1,940	8.2	5,485.9	5,485.9	5,485.9	0.0
Q	34,393	202	1,655	9.6	5,489.4	5,489.4	5,489.4	0.0
R	34,779	517	2,973	5.4	5,491.9	5,491.9	5,491.9	0.0
S	35,218	802	2,405	6.3	5,503.6	5,503.6	5,503.7	0.1
T	35,514	709	2,382	6.4	5,503.6	5,503.6	5,503.7	0.1
U	36,210	670	2,440	6.2	5,509.6	5,509.6	5,509.6	0.0
V	37,219	543	2,354	5.4	5,516.3	5,516.3	5,516.4	0.2

<sup>1</sup> Feet above confluence with Toll Gate Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**WEST TOLL GATE CREEK, LOWER REACH**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
West Toll Gate Creek Lower Reach								
W	37,708	450	1,992	6.4	5,517.5	5,517.5	5,517.7	0.2
X	38,499	297	1,580	8.1	5,519.8	5,519.8	5,519.8	0.0
Y	39,140	266	1,697	7.5	5,522.0	5,522.0	5,522.0	0.0
Z	39,584	185	669	10.8	5,525.3	5,525.3	5,525.3	0.0
AA	40,010	134	742	9.7	5,530.5	5,530.5	5,530.5	0.0
AB	40,447	137	676	10.7	5,534.2	5,534.2	5,534.2	0.0
AC	41,637	303	954	7.6	5,539.0	5,539.0	5,539.1	0.1
AD	42,287	216	748	9.6	5,543.2	5,543.2	5,543.2	0.0
AE	43,131	301	1,087	6.6	5,549.2	5,549.2	5,549.4	0.2
AF	44,433	266	859	8.4	5,554.8	5,554.8	5,554.9	0.1
AG	45,780	217	644	7.1	5,571.0	5,571.0	5,571.1	0.1
AH	47,508	231	527	7.5	5,584.4	5,584.4	5,584.4	0.0
AI	48,943	79	280	11.0	5,594.4	5,594.4	5,594.5	0.1
AJ	50,594	48	242	12.7	5,607.2	5,607.2	5,607.3	0.1
AK	51,597	167	215	6.6	5,615.9	5,615.9	5,615.9	0.0
AL	52,993	219	345	4.1	5,625.9	5,625.9	5,625.9	0.0
AM	54,783	148	313	4.5	5,640.5	5,640.5	5,640.5	0.0
AN	55,237	247	1,119	1.3	5,646.5	5,646.5	5,646.5	0.0
AO	56,235	150	209	6.7	5,650.4	5,650.4	5,650.4	0.0
AP	57,169	50	172	8.2	5,657.2	5,657.2	5,657.2	0.0
AQ	57,686	200	1,099	1.3	5,662.0	5,662.0	5,662.0	0.0
AR	58,654	171	219	6.4	5,699.3	5,699.3	5,699.3	0.0

<sup>1</sup> Feet above confluence with Toll Gate Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**WEST TOLL GATE CREEK, LOWER REACH**

FLOODING SOURCE		FLOODWAY			BASE FLOOD WATER-SURFACE ELEVATION (FEET NAVD)			
CROSS SECTION	DISTANCE <sup>1</sup>	WIDTH (FEET)	SECTION AREA (SQUARE FEET)	MEAN VELOCITY (FEET PER SECOND)	REGULATORY	WITHOUT FLOODWAY	WITH FLOODWAY	INCREASE
West Toll Gate Creek Upper Reach								
AS	65,232	189	633	3.0	5,727.2	5,727.2	5,727.2	0.0
AT	67,579	117	197	4.1	5,735.9	5,735.9	5,735.9	0.0
AU	69,254	75	155	5.3	5,756.3	5,756.3	5,756.3	0.0
AV	70,199	205	204	4.0	5,767.1	5,767.1	5,767.1	0.0
AW	71,650	82	200	4.1	5,781.3	5,781.3	5,781.3	0.0
AX	73,538	150	210	3.2	5,802.6	5,802.6	5,802.6	0.0
AY	74,642	332	3,043	0.2	5,822.5	5,822.5	5,822.5	0.0
AZ	76,538	118	147	4.6	5,839.6	5,839.6	5,839.6	0.0
BA	77,592	45	63	5.7	5,852.0	5,852.0	5,852.0	0.0
BB	78,856	42	55	6.4	5,865.9	5,865.9	5,866.0	0.1
BC	80,989	108	82	4.3	5,898.5	5,898.5	5,898.5	0.0
BD	82,486	117	108	5.1	5,926.8	5,926.8	5,926.8	0.0
BE	83,347	59	86	6.4	5,949.3	5,949.3	5,949.3	0.0

<sup>1</sup> Feet above confluence with Toll Gate Creek

TABLE 5

FEDERAL EMERGENCY MANAGEMENT AGENCY  
**ARAPAHOE COUNTY, CO**  
**AND INCORPORATED AREAS**

FLOODWAY DATA

**WEST TOLL GATE CREEK, UPPER REACH**

## 5.0 INSURANCE APPLICATIONS

For flood insurance rating purposes, flood insurance zone designations are assigned to a community based on the results of the engineering analyses. These zones are as follows:

### Zone A

Zone A is the flood insurance risk zone that corresponds to the 1-percent-annual-chance floodplains that are determined in the FIS by approximate methods. Because detailed hydraulic analyses are not performed for such areas, no BFEs or base flood depths are shown within this zone.

### Zone AE

Zone AE is the flood insurance risk zone that corresponds to the 1-percent-annual-chance floodplains that are determined in the FIS by detailed methods. In most instances, whole-foot BFEs derived from the detailed hydraulic analyses are shown at selected intervals within this zone.

### Zone AH

Zone AH is the flood insurance risk zone that corresponds to the areas of 1-percent-annual-chance shallow flooding (usually areas of ponding) where average depths are between 1 and 3 feet. Whole-foot BFEs derived from the detailed hydraulic analyses are shown at selected intervals within this zone.

### Zone AO

Zone AO is the flood insurance risk zone that corresponds to the areas of 1-percent-annual-chance shallow flooding (usually sheet flow on sloping terrain) where average depths are between 1 and 3 feet. Average whole-foot base flood depths derived from the detailed hydraulic analyses are shown within this zone.

### Zone X

Zone X is the flood insurance risk zone that corresponds to areas outside the 0.2-percent-annual-chance floodplain, areas within the 0.2-percent-annual-chance floodplain, areas of 1-percent-annual-chance flooding where average depths are less than 1 foot, areas of 1-percent-annual-chance flooding where the contributing drainage area is less than 1 square mile, and areas protected from the 1-percent-annual-chance flood by levees. No BFEs or base flood depths are shown within this zone.

## Zone X (Future Base Flood)

Zone X (Future Base Flood) is the flood insurance risk zone that corresponds to the 1-percent-annual-chance floodplains that are determined based on future-conditions hydrology. No BFEs or base flood depths are shown within this zone.

## **6.0 FLOOD INSURANCE RATE MAP**

The FIRM is designed for flood insurance and floodplain management applications.

For flood insurance applications, the map designates flood insurance risk zones as described in Section 5.0 and, in the 1-percent-annual-chance floodplains that were studied by detailed methods, shows selected whole-foot BFEs or average depths. Insurance agents use the zones and BFEs in conjunction with information on structures and their contents to assign premium rates for flood insurance policies.

For floodplain management applications, the map shows by tints, screens, and symbols, the 1- and 0.2-percent-annual-chance floodplains, floodways, and the locations of selected cross sections used in the hydraulic analyses and floodway computations.

The current FIRM presents flooding information for the geographic area of Arapahoe County, including those communities which fall within more than one county as described in Section 1.1. Previously, separate FIRMs were prepared for the cities of Aurora and Littleton, and for Arapahoe County and Incorporated Areas. Historical data relating to the maps prepared for each community are presented in Community Map History (Table 6).

COMMUNITY NAME	INITIAL IDENTIFICATION	FLOOD HAZARD BOUNDARY MAP REVISION DATE(S)	FIRM EFFECTIVE DATE(S)	FIRM REVISION DATE(S)
Arapahoe County (Unincorporated Areas)	December 20, 1974		August 15, 1977	August 16, 1995
Aurora, City of	July 26, 1974		June 1, 1978	September 7, 1998
Centennial, City of	December 11, 2002		August 16, 1995	August 16, 1995
Cherry Hills Village, City of	May 10, 1974		August 1, 1978	August 16, 1995
Columbine Valley, Town of	January 25, 1974	April 23, 1976	June 15, 1978	December 2, 1980 August 16, 1995
*Deer Trail, City of	November 29, 1974			
Englewood, City of	February 9, 1972		July 1, 1974	April 11, 1975 June 24, 1977 July 28, 1978 December 5, 1979 August 16, 1995
*Foxfield, Town of				
Glendale, City of	April 17, 1989		April 17, 1989	August 16, 1995
Greenwood Village, City of	December 27, 1974		January 5, 1978	December 16, 1980 August 16, 1995
Littleton, City of	February 1, 1974		December 1, 1978	September 29, 1989
Sheridan, City of	May 3, 1974		July 13, 1976	December 4, 1985 August 16, 1995

\*Non-Floodprone

**TABLE 6**

**FEDERAL EMERGENCY  
MANAGEMENT AGENCY  
  
ARAPAHOE COUNTY, CO  
AND INCORPORATED AREAS**

**COMMUNITY MAP HISTORY**

## **7.0 OTHER STUDIES**

This Flood Insurance Study supersedes all previous FIS reports and FIRMs covering the unincorporated areas of Arapahoe County and the incorporated areas of the Cities of Aurora, Centennial, Cherry Hills Village, Englewood, Glendale, Greenwood Village, Littleton, and Sheridan; and the Town of Columbine Valley (References 2, 5, 7, 8, 9, 10, 88 and 89).

The reaches of East Toll Gate Creek from Chambers Road to 1,300 feet upstream and from South Buckley Road to 0.8 mile upstream were analyzed by Merrick and Company and Greiner Engineering Sciences, Inc., respectively (References 18 and 19, respectively). The revised hydraulic analyses for West Toll Gate Creek from Mississippi Avenue to approximately 800 feet upstream of Mexico Avenue, and the portion of West Toll Gate Creek from South Buckley Road upstream to East Hampden Avenue were performed by the City of Aurora Engineering Division (References 21 and 22). The analyses for the portion of West Toll Gate Creek between East Hampden and East Quincy Avenues was performed by Merrick and Company (Reference 19). The hydrologic analyses for all the revisions were originally performed by the COE and Ginger and Associates for the effective FIS for Aurora (Reference 2).

Revised hydrologic and hydraulic analyses for the portion of Cherry Creek from Cherry Creek State Recreation Area to upstream of the Arapahoe/Douglas County line were performed by Greiner Engineering Sciences, Inc. as a part of the River Run Development Report (Reference 17).

The revised hydraulic analyses for portions of Prentice Gulch, Willow Creek, Greenwood Gulch, Spring Creek, Goldsmith Gulch, SJCD 6100, SJCD 6200, Dutch Creek, Coon Creek, and Lee Gulch were taken from published UDFCD reports (References 44, 60, 61, 62, 63, and 64).

Flood Insurance Studies have been prepared for the City and County of Denver and Adams, Douglas, and Jefferson Counties (References 65, 66, 67, and 68, respectively). Those studies are in general agreement with this study.

Historical data relating to the maps prepared for each community are presented in the Community Map History data (Table 5).

## **8.0 LOCATION OF DATA**

Information concerning the pertinent data used in the preparation of this study can be obtained by contacting FEMA Mitigation Division, Denver Federal Center, Building 710, Box 25267, Denver, Colorado 80225-0267.

## 9.0 BIBLIOGRAPHY AND REFERENCES

1. U.S. Department of Housing and Urban Development, Federal Insurance Administration, Flood Insurance Study, Arapahoe County, Colorado, (Unincorporated Areas), August 15, 1977.
2. Federal Emergency Management Agency, Federal Insurance Administration, Flood Insurance Study, Aurora, Colorado, August 31, 1982.
3. U.S. Department of Housing and Urban Development, Federal Insurance Administration, Flood Insurance Study, City of Cherry Hills Village, Colorado, August 1, 1978.
4. McCall-Ellingson Consulting Engineers, Study and Report on Quincy Gulch Sub-Basin, Little Dry Creek Drainage Basin, City of Cherry Hills Village, May 1973.
5. Federal Emergency Management Agency, Federal Insurance Administration, Flood Insurance Study, Town of Columbine Valley, Colorado, December 2, 1980.
6. Federal Emergency Management Agency, Federal Insurance Administration, Flood Insurance Study, City of Greenwood Village, Colorado, December 16, 1980.
7. U.S. Department of Housing and Urban Development, Federal Insurance Administration, Flood Insurance-Study, City of Englewood, Colorado, December 15, 1979.
8. Federal Emergency Management Agency, Federal Insurance Administration, Flood Insurance Study, City of Littleton, Colorado, February 3, 1981.
9. Federal Emergency Management Agency, Federal Insurance Administration, Flood Insurance Study, City of Sheridan, Colorado, December 4, 1985.
10. Urban Drainage and Flood Control District, Major Drainage Planning-- First Creek Phase B, Volume II, Engineering Consultants, Inc., Aurora, Colorado, March 1977.
11. Urban Drainage and Flood Control District, Arapahoe and Douglas Counties, Piney Creek, Flood Hazard Area Delineation, prepared by Gingery Associates, Inc., October 1975.
12. Urban Drainage and Flood Control District, Arapahoe and Douglas Counties, Murphy Creek, Flood Hazard Area Delineation, prepared by Gingery Associates, Inc., October 1975.

13. Urban Drainage and Flood Control District, Arapahoe and Douglas Counties, Lone Tree Creek, Flood Hazard Area Delineation, prepared by Gingery Associates, Inc., October 1975.
14. Urban Drainage and Flood Control District, Arapahoe and Douglas Counties, Happy Canyon Creek, Flood Hazard Area Delineation, prepared by Gingery Associates, Inc., November 1977.
15. Urban Drainage and Flood Control District, Arapahoe and Douglas Counties, Cottonwood Creek, Flood Hazard Area Delineation, prepared by Gingery Associates, Inc., October 1975.
16. Urban Drainage and Flood Control District, Major Drainageway Planning, Lee Gulch Little Creek Phase B--Preliminary Design, prepared by KKBNA, Denver, Colorado, January 1977.
17. Greiner Engineering, River Run Development, Letter of Map Revision, Arapahoe County, Colorado, June 1985.
18. Merrick and Company, East Toll Gate Creek 100-Year Floodplain Amendment Report, Denver, Colorado, November 1982.
19. Merrick and Company, Hydraulic Analysis of West Toll Gate Creek From East Hampton Avenue to East Quincy Avenue, Denver, Colorado, December 1985.
20. Greiner Engineering Sciences, Inc., Toll Gate Village--Filing No. 14, Denver, Colorado, October 1985.
21. City of Aurora, Engineering Division, West Toll Gate Creek Mississippi to Mexico, September 1985.
22. City of Aurora, Engineering Division, Request For Flood Insurance Rate Map Amendments, September 1985.
23. Holland Corporation, Overlot Grading Improvements Between 500 Feet West and 1,200 Feet East of South Flanders Street, Englewood, Colorado, 1984.
24. Denver Regional Council of Governments, Floodplain Information--Big Dry Creek, Little Dry Creek (Arapahoe County), Greenwood Gulch, Weir Gulch, Lakewood Gulch, South Lakewood Gulch, McIntyre Gulch, Little Dry Creek, (Adams County), Grange Hall Creek--Volume IV-Denver Metropolitan Region, Colorado, prepared by U.S. Army Corps of Engineers, Omaha, District, October 1968.

25. Denver Regional Council of Governments, Floodplain Information-Sand, Toll Gate, and Lower Cherry, Creeks, Volume II (Revised), Denver Metropolitan Region, Colorado, prepared by U.S. Army Corps of Engineers, Omaha, District, July 1971.
26. U.S. Department of the Interior, Geological Survey, Water-Supply Paper 1681, Magnitude and Frequency of Floods in the United States--Part 7, Lower Mississippi River Basin, James L. Patterson, 1964.
27. U.S. Department of the Interior, Geological Survey, Water-Supply Paper 1850-B, Floods of June 1965 in South Platte River Basin, Colorado, H.F. Matthai, 1969.
28. U.S. Department of the Interior, Geological Survey, Water Resources Data for Colorado, Part I, 1964.
29. U.S. Department of the Interior, Geological Survey, Map of Flood Prone--Areas, 7.5-Minute Series Topographic Map, Scale 1:24,000, Contour Interval 20 feet: Arapahoe County, Colorado (1969), Revised (1975).
30. Urban Drainage and Flood Control District, Major Drainageway Master Plan--Big Dry Creek, Denver, Colorado, June 1974.
31. Colorado Water Conservation Board, Release No. 27, Rainfall-Runoff Data from Small Watersheds in Colorado June, 1968 through September, 1971--Colorado Water Resources Basic Data, prepared by U.S. Geological Survey in cooperation with Urban Drainage and Flood Control District and Colorado Department of Highways, Denver, Colorado, 1972.
32. City of Littleton, The Littleton Plan, Littleton, Colorado, December 1971.
33. City of Littleton, Platte River Valley: Two Choices for Littleton, Jim Bartlett, 1971.
34. Urban Drainage and Flood Control District, Major Drainageway Planning--Little Dry Creek, Volumes 1 and 2, prepared by McCall, Ellingson and Morrill, .Inc., Denver, Colorado, May 1974.
35. City of Aurora, Colorado, Sand Creek Channel Project, Addendum to the Master Plan for the Improvement of Sand Creek, prepared by Raub, Bein, Frost and Associates, Newport Beach, California, October 1973.
36. U.S. Department of the Interior, Geological Survey, Water-Supply Paper 1680, Magnitude and Frequency of Floods in the United States--Part 6B, Lower Mississippi River Basin Below Sioux City, Iowa, H.F. Matthai, 1968.

37. Urban Drainage and Flood Control District, Urban Storm Drainage-Criteria Manual, Volumes I and II, prepared by Wright-McLaughlin Engineers, Denver, Colorado, March 1969.
38. U.S. Department of the Army, Corps of Engineers, Hydrologic Engineering Center, HEC-I, Flood Hydrograph Package, 723-010 and HEC-II Water-Surface Profiles, 723-X6-L202A, Davis, California.
39. U.S. Department of the Interior, Geological Survey, 7.5-Minute Series Topographic Maps, Scale 1:24,000, Contour Interval 10 Feet: Coal Creek, Colorado (1965), Photorevised (1980); Highlands Ranch, Colorado, (1965), Photorevised (1980); Piney Creek, Colorado (1966), Photorevised (1978).
40. U.S. Department of the Army, Corps of Engineers, Downstream Channel Improvements Stage I, South Platte River Chatfield Lake Colorado, January 1984.
41. U.S. Department of the Army, Corps of Engineers, Downstream Channel Improvements Stage II, South-Platte River Chatfield Lake, Colorado, December 1984.
42. U.S. Department of the Army, Corps of Engineers, Downstream Channel Improvement Stage III, South Platte River.
43. Urban Drainage and Flood Control District, Flood Hazard Delineation, South Platte River, Denver Metropolitan Area, Sand Creek to Oxford Avenue, September 1985.
44. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Goldsmith Gulch and Tributaries, prepared by Gingery Associates, Inc., June 1976.
45. Urban Drainage and Flood Control District, Major Drainageway Master Plan, Big Dry Creek, Volume I, prepared by VTN Colorado, Inc., March 1974.
46. Urban Drainage and Flood Control District, Major Drainageway Master Plan, Big Dry Creek, Volume II, prepared by VTN Colorado, Inc., June 1975.
47. Scharf and Associates, Inc., Topographic Maps, Scale 1:1,200, Contour Interval 2 feet: Bear Creek (January 1979).
48. Bell Mapping Company, Denver, Colorado, Sand Creek Aerial Topographic Maps, Scale 1:1,200, Contour Interval 2 feet: Aurora, Colorado (1974).

49. Parker Aerial Surveys, Aerial Topographic Maps, Scale 1:1,200, Contour Interval 2 feet: Toll Cate Creek, Aurora, Colorado (1973).
50. Nelson, Haley, Patterson, and Quirk, Inc., Aerial Topographic Mapping, Scale 1:1,200, Contour Interval 2 feet: (R66W-T4S, Sections 8, 15, 16, 17, 20, 22, 29, Aurora, Colorado (1971).
51. Bell Mapping Company, Aerial Topographic Maps, Scale 1:1,200, Contour Interval 2 feet: Westerly Creek, Aurora, Colorado (1974).
52. Northway-Gestalt, Topographic Mapping, Scale 1:1,200, Contour Interval 2 feet, 1981.
53. U.S. Department of the Army, Corps of Engineers, Omaha District, Cherry Creek Floodplain Information Report, 1976.
54. Kucera Associates and Gingery Associates, Aerial Topographic Maps, Scale 1:2,400, Contour Interval 2 feet: Sable Ditch and Granby Ditch, Aurora, Colorado (September 1976).
55. U.S. Department of the Interior, Geological Survey, 7.5-Minute Series Topographic Quadrangle Maps, Scale 1:24,000, Contour Interval 10 feet: Box Elder School, Colorado (1966); Sable, Colorado (1965); Fitzsimons, Colorado (1965), Photorevised (1971).
56. U.S. Department of the Interior, Geological. Survey, 7.5-Minute Series Quandrangle Map, Scale 1:24,000, Contour Interval 10 feet: Littleton, Colorado (1965).
57. Urban Drainage and Flood Control District, Major Drainageway Planning, Little Dry Creek, Volumes I and II, prepared by McCall, Ellingson & Morrill, Inc., 1974.
58. U.S. Department of the Interior, Geological Survey, 7.5-Minute Series Topographic Maps, Scale 1:24,000, Contour Interval 10 feet: Littleton, Colorado (1965), Photorevised (1971); Fort Logan, Colorado (1965), Photorevised (1971); Englewood, Colorado (1965), Photorevised (1971); Highlands Ranch, Colorado (1965), Photorevised (1971).
59. Federal Emergency Management Agency, Federal Insurance Administration, Flood Insurance Rate Map, Town of Deer Trail, Colorado, November 5, 1985.
60. Urban Drainage and Flood Control District, Major Drainageway Planning, Little Creek, prepared by McCall, Ellingson and Morrill, Inc., May 1974.
61. Urban Drainage and Flood Control District, Major Drainageway Planning Basin 6100, CH2M HILL, July 1976.

62. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Massey Draw and North Tributary SJCD (South) 6200 and Tributaries, prepared by Leonard Rice Consulting Water Engineers, Inc., May 1978.
63. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Dutch Creek, Lilley Gulch, Coon Creek, and Three Lakes Tributary, prepared by URS Company, May 1978.
64. Urban Drainage and Flood Control District, Major Drainageway Planning, Lee Gulch, Little Creek, prepared by KKBNA Consulting Engineers, July 1978.
65. Federal Emergency Management Agency, Federal Insurance Administration, Flood Insurance Study, City and County of Denver, Colorado, April 15, 1986.
66. U.S. Department of Housing and Urban Development, Federal Insurance Administration, Flood Insurance Study, Adams County, Colorado (Unincorporated Areas), February 1, 1979.
67. Federal Emergency Management Agency, Federal Insurance Administration, Flood Insurance Study, Douglas County, Colorado, September 30, 1987.
68. Federal Emergency Management Agency, Federal Insurance Administration, Flood Insurance Study, Jefferson County, Colorado, (Unincorporated Areas), August 5, 1986.
69. Merrick and Company, Colorado Boulevard Bridge Over Big Dry Creek, Floodplain Delineation Plan, Scale 1:50, Contour Interval 2 feet, September 23, 1987, Revised May 3, 1988.
70. McCall-Ellingson & Morrill, Inc., Major Drainageway Planning, Little Dry Creek, February 1974.
71. McLaughlin Water Engineers, Ltd., Hydrologic Evaluation, Little Dry Creek, July 1986.
72. Greenhorne & O'Mara, Inc., Stream Stabilization and Major Crossing Planning, Little Dry Creek, Willow Creek, and Tributaries, September 1989.
73. Merrick & Company, Big Dry Creek LOMR, February 1988.
74. U.S. Department of the Army, Corps of Engineers, Hydrologic Engineering Center, HEC-2 Water-Surface Profiles, Version 4.6.0, February 1991.

75. Landmark Mapping, Ltd., Arapahoe County, Willow Creek, dates flown: November 24 and December 7, 1987.
76. Western Control, Kucera and Associates, Inc., Arapahoe County, Goldsmith Gulch, dates flown: February 22, 1973 and January 1976.
77. Bell Mapping Company, Arapahoe County, Big Dry Creek, date flown: October 1, 1973.
78. Source Unknown, Arapahoe County, Big Dry Creek, and Arapahoe County, Piney Creek.
79. Arapahoe County Base Maps, Township Code 2075; Quarter Sections 1, 2, and 4.
80. U.S. Geological Survey, Highlands Ranch Quadrangle, Colorado, 1965, Photo revised 1980.
81. Federal Emergency Management Agency, Flood Insurance Rate Map Panel 080050009F; Arapahoe County, Colorado, April 17, 1989.
82. City of Littleton, Request for Letter of Map Revision for Littles Creek Channel Improvement Project, Love & Associates, Inc., January 1989.
83. Urban Drainage and Flood Control District, Flood Hazard Area Delineation for Lower Box Elder Creek Watershed, prepared by Wright Water Engineers, Inc., Denver, Colorado, September 2001.
84. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Coyote Run and Upper Box Elder Creek, prepared by CH2MHill, December, 1995.
85. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Cherry Creek Corridor – Reservoir to Scott Road, prepared by URS Corporation, May, 2003.
86. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Little Dry Creek (ARAPCO) & Tributaries, prepared by WRC Engineering, Inc., August, 2003.
87. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Upper Goldsmith Gulch, prepared by Moser & Associates, April, 2005.
88. Federal. Emergency Management Agency, Flood Insurance Study, City of Aurora, Colorado, September 7, 1998.

89. Federal. Emergency Management Agency, Flood Insurance Study, City of Littleton, Colorado, September 29, 1989.
90. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Massey Draw and SJCD (South), prepared by Olsson Associates, December, 2005.
91. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Murphy Creek, prepared by Moser and Associates, September, 2006.
92. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Cottonwood Creek, prepared by Muller Engineering Company, Inc., August 2011.
93. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, East Toll Gate Creek (Upper), prepared by J3 Engineering Consultants, December 2010.
94. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, First Creek (Upstream of Buckley Road), prepared by Moser & Associates Engineering, October 2011.
95. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Piney Creek and Antelope Creek, prepared by WRC Engineering, Inc., December 2011.
96. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Second Creek (Upstream of Denver International Airport), Existing Conditions Flood Hazard Information developed with this study, prepared by Olsson Associates and Matrix Design Group, Inc., May 2011.
97. Urban Drainage and Flood Control District, Flood Hazard Area Delineation, Willow Creek, prepared by CH2M Hill, December 2010.
98. Cherry Creek (Cherry Creek Dam to South Platte River) Flood Hazard Delineation, Matrix Design Group, Inc., November 2013.
99. Flood Hazard Delineation, Sand Creek Colfax to Yale, Matrix Design Group, October 2012.
100. Toll Gate Creek and East Toll Gate Creek (Downstream of Hampden) Flood Hazard Delineation, J3 Engineering Consultants, November 2013.
101. Happy Canyon Creek Flood Hazard Delineation (FHAD), Muller Engineering Company, Inc., July 2014.
102. Flood Hazard Area Delineation Senac Creek Aurora Reservoir Dam to Coal Creek, Matrix Design Group, Inc., November 2013.

103. Flood Hazard Delineation West Toll Gate Creek, Michael Baker Jr. Inc., and Ingenuity Engineering Solutions, November 2013.

104. Flood Hazard Delineation Littles Creek, AMEC Earth & Environmental, July 2012.

## **10.0 REVISION DESCRIPTIONS**

This section has been added to provide information regarding significant revisions made since the original FIS report and FIRM were printed. Future revisions may be made that do not result in the republishing of the FIS report. All users are advised to contact the community repositories of flood hazard data to obtain the most up-to-date flood hazard information.

### **10.1 First Revision**

This study was revised on March 4, 1991, to show modifications to the flooding and base flood elevations along Little Dry Creek as the result of revised hydrology for the entire basin and culvert and channel improvements from the South Platte River upstream to Clarkson Street, as approved in the Conditional Letters of Map Revision issued on February 19, 1987, and August 21, 1987.

An updated hydrologic evaluation for Little Dry Creek was conducted by McLaughlin Water Engineers, Ltd. (MWE), in July 1986 to determine the 100-year flow by utilizing the 1982 version of Colorado Urban Hydrograph Procedure in conjunction with the UDSWM2-PC model. The 100-year discharge used for this floodplain analysis was taken from the updated 1986 hydrologic analysis for the 100-year event. The hydrologic analyses for the 10-, 50-, and 500-year events are based on an earlier report by Sellards and Grigg, Inc., in 1981. Along Little Dry Creek, the 100-year discharge of 3,770 cfs from the 1986 updated hydrologic study is lower than the 100-year discharge of 6,650 cfs presented in the previous Flood Insurance Study report due to the effects of the Holly and Englewood Dams.

The basis for this revision is the completion of a box culvert and channel improvements along Little Dry Creek from the confluence of the South Platte River to Clarkson Street in Englewood, Colorado. The box culvert, located approximately 800 feet upstream of Santa Fe Drive and approximately 600 feet downstream of South Broadway Street, was designed to convey the 10-, 50-, and 100-year floods. The 100- and 500-year floodplain and 100-year floodway delineations and base flood elevations were modified based on the following information:

- Drawings 1 through 12, XI and X2 of "as-built" plans entitled "Little Dry Creek - South Platte River to Clarkson Street, City of Englewood, Colorado; Floodplain Delineation for Constructed Improvements," prepared by MWE, dated April 1989, for the City of Englewood, Colorado.

- A report entitled "Hydraulic Calculations for Little Dry Creek through the City of Englewood," dated April 1989, also prepared by MWE. This report contains hydraulic calculations and HEC-2 hydraulic computer model runs for the 10-, 50-, 100-, and 500-year recurrence interval floods for a reach of Little Dry Creek from the South Platte River to Clarkson Street.

These calculations and models reflect the effects of the construction of the culvert located from Santa Fe Drive upstream to Broadway Street, and channel improvements from the South Platte River to Santa Fe Drive and from Broadway Street to Clarkson Street. As a result of these improvements, the base flood elevations were decreased, and modifications to the floodway and the 100- and 500-year floodplain boundaries were made, as shown on Flood Insurance Rate Map Panels 0060 and 0070. Because a revised hydraulic analysis was not developed upstream of South Clarkson Street, there is an approximate Zone A transition from South Clarkson Street to the culvert entrance. Also, because the 500-year recurrence interval flood is not conveyed by the culvert, a separate water-surface profile panel labeled "500-year overflow" is included in the water-surface profile panels for Little Dry Creek.

Distances on the profiles and Floodway Data Tables have been corrected to reflect miles measured from the confluence with the South Platte River. Cross sections previously labeled A through BM along Little Dry Creek as shown on the Flood Insurance Rate Map have been relabeled 0 through CA to account for the addition of the new cross sections labeled A through N along the study reach. The water-surface profile panels for Little Dry Creek have also been renumbered in order to take into account the addition of six profiles for the study area, and the profiles listed after Little Dry Creek in the Flood Insurance Study report have been renumbered as a result of this addition. The Floodway Data Tables and Summary of Discharges Table have also been revised to reflect the effects of the reanalysis.

The communities affected by this revision along Little Dry Creek are the unincorporated areas of Arapahoe County, the City of Cherry Hills Village, the City of Englewood, and the City of Greenwood Village.

The reach of Big Dry Creek from approximately 1,360 feet downstream of Colorado Boulevard to approximately 2,440 feet upstream of Colorado Boulevard has been revised to reflect the change in base flood elevations and floodway and floodplain delineations due to the newly built Colorado Boulevard Bridge and channel improvements. The COE HEC-2 hydraulic computer program was used by Merrick and Company to perform the new hydraulic analyses. The 100-year floodway and floodplain delineations were also prepared by Merrick and Company on a topographic map at a scale of 1:50, with a contour interval of 2 feet (Reference 69). The Floodway Data Table and Flood

Profile Panels for Big Dry Creek have been revised between cross sections BA and BE as a result of this analysis.

This revision also incorporated the Letter of Map Revision (LOMR) issued for Arapahoe County, Colorado on August 13, 1990, for an area along Cottonwood Creek from an existing pedestrian bridge (located approximately 900 feet upstream of Inverness Drive East) to County Line Road. This LOMR was based on better topographic data and a revised hydraulic analysis. The basis for this LOMR was the following submitted data: a report entitled "Request for Letter of Map Revision and Request for Conditional Letter of Map Revision for Cottonwood Creek, Arapahoe County, Colorado," dated March 1990, and prepared by Greenhorne & O'Mara, Inc., and an as-built drawing entitled "Cottonwood Creek Floodplain and Floodway for Letter of Map Revision," dated January 1990, prepared by Greenhorne & O'Mara, Inc. As a result of the above-referenced data, profile panels were also revised.

## 10.2 Second Revision

This study was revised on December 3, 1993, to show revised floodplain analyses for Big Dry Creek, Goldsmith Gulch, Piney Creek, and Willow Creek.

The hydraulic analysis was performed by Love & Associates, Inc., Boulder, Colorado, for the Federal Emergency Management Agency (FEMA) under their Limited Map Maintenance Program (LMMP), Contract No. EMW-90-C-3132, completed in March 1992.

An initial Consultation and Coordination Officer (CCO) meeting was held in July 1990, and attended by representatives of Arapahoe County, FEMA, and Love & Associates, Inc.

Contacts to acquire information were made with the Arapahoe County Department of Highways /Engineering, the Urban Drainage and Flood Control District, and FEMA. The area of study included portions of the City of Greenwood Village and the unincorporated areas of Arapahoe County.

### Principal Flood Problems

Factors that aggravate flood problems: All streams studied in this Flood Insurance Study have had structural improvements, but intense and infrequent thunderstorms can generate floods in excess of existing structural capacities. Urbanization has occurred and development continues along these streams. This will increase debris loading in flood events and cause obstruction of bridges and culverts, thus causing more extensive damage.

### Flood Protection Measures

Structures: Drop structures have been constructed on several of the creeks studied, as well as improved culverts and bridges on roads.

Dams: Englewood Dam, located on Willow Creek, provides flood protection for the area around Willow Creek downstream of the dam to its confluence with Little Dry Creek.

### Hydrologic Analyses

In general, the only source of hydrologic information for these creeks is the previous Flood Insurance Studies and HEC-2 decks, although some additional information was available for Big Dry Creek and Willow Creek.

### Goldsmith Gulch

The only source of information for Goldsmith Gulch in the LMMP study reach is the previous Flood Insurance Study HEC-2 deck in which the discharge varies by reach. At Dayton Street the 100-year discharge is 1,090 cubic feet per second (cfs) and at the outlet of Arapahoe Lake the 100-year discharge is 800 cfs.

### Piney Creek

The only source of information for Piney Creek hydrology is the previous Flood Insurance Study HEC-2 deck in which the discharge varies by reach. The discharges at Parker Road are:

<u>Return Period (year)</u>	<u>Flood Insurance Study (cfs)</u>
10	5,400
50	8,500
100	9,800
500	21,000

### Willow Creek

The primary source of information for Willow Creek is the McCall, Ellingson & Morrill (1974) report which was used for the previous Flood Insurance Study. The computer model input was unavailable for this study. Greenhorne & O'Mara (1989) used the McCall, Ellingson & Morrill report as a basis for a study located upstream of Englewood Dam. Downstream of Englewood Dam, the McCall, Ellingson & Morrill report presents a flow rate at the confluence with Little Dry Creek, but does not report the outflow rate of the dam. McLaughlin Water Engineers (1986) present flow rates for the outlet of Englewood Dam and at the

confluence with Little Dry Creek. The 100-year discharge from each of these sources is presented below (References 70, 71, and 72).

Willow Creek 100-Year Discharges

<u>Downstream of Englewood Dam</u>		<u>Upstream of Englewood Dam</u>			
Confluence with Little Dry Creek (0.37 mi <sup>2</sup> )	Englewood Dam outlet outflow	Dry Creek Road (8.1 mi <sup>2</sup> )	Upstream of Confluence with Tributary (6.9 mi <sup>2</sup> )	Quebec Street (6.55 mi <sup>2</sup> )	Mineral Avenue (5.46 mi <sup>2</sup> )
660 <sup>1</sup>	190 <sup>2</sup>	6100 <sup>1</sup>	5200 <sup>1</sup>	5070 <sup>3</sup>	4600 <sup>1</sup>
880 <sup>2</sup>					

<sup>1</sup> McCall, Ellingson & Morrill (1974)

<sup>2</sup> McLaughlin Water Engineers (1986)

<sup>3</sup> Greenhorne & O'Mara (1989)

Big Dry Creek

Two sources of information exist for Big Dry Creek. The first is a previous Flood Insurance Study HEC-2 deck, and the second is a FEMA accepted Letter of Map Revision (LOMR) for the channel from approximately 2,000 feet upstream of South Colorado Boulevard to approximately 1,000 feet downstream of South Colorado Boulevard (Reference 73). The table below shows the flow rates for Big Dry Creek at South Colorado Boulevard. The 100-year flow rates for the two FEMA accepted studies differ by over 1,000 cfs at this location. The data from the 1974 Flood Insurance Study were used for this study.

Big Dry Creek at South Colorado Boulevard

Return Period (year)	Flood Insurance Study (1974)	LOMR (1988)
10	6,673	
50	8,520	
100	9,757	8,600
500	15,968	

Hydraulic Analysis

Cross section data for streams in the area were digitized from maps and copied from previous HEC-2 decks.

All bridges and culverts were surveyed to obtain elevation data and structural geometry.

Roughness coefficients (Manning's "n") were estimated from field inspection and photographs of the study reaches. Water-surface profiles were developed using the HEC-2 computer backwater model (Reference 74). Profiles were determined for the 100-year floods on Goldsmith Gulch and Willow Creek, and the 10-, 50-, 100-, and 500-year floods for Piney Creek and Big Dry Creek.

The starting water-surface elevations for all streams were obtained from the previous Flood Insurance Study.

All elevations are referenced to National Geodetic Vertical Datum of 1929.

Maps used for floodplain boundaries are as follows:

- 1) Topographic maps used as work maps: Scale 1:1,200, Contour interval 2 feet, (References 75, 76, 77, and 78)
- 2) Arapahoe County Base Maps: Scale 1:2,400, no contours (Reference 79)
- 3) USGS quad map; Highlands Ranch Quadrangle: Scale 1:12,000, Contour interval 10 feet, (Reference 80)
- 4) Federal Emergency Management Agency, Flood Insurance Rate Map Panel 0800500095F; Arapahoe County: Scale 1:6,000, no contours (Reference 81)

#### Floodways

Equal conveyance reduction encroachment Method 4 was used for the floodway determination for Big Dry Creek and Piney Creek.

### 10.3 Third Revision

#### Digital Update

The mapping for this update has been prepared using digital data. Previously published Flood Insurance Rate Map data produced manually have been converted to vector digital data by a digitizing process. These vector data were fit to raster digital images of the USGS quadrangle maps of the county area to provide horizontal positioning.

Road, highway names and centerline data have been obtained from the United States Census Bureau's TIGER (Topologically Integrated Geographic Encoding and Referencing) File. The centerlines were modified to the positional accuracy of the USGS quadrangle, and the

roads, highways, and street names were modified from the Flood Insurance Rate Map panels. The City of Aurora road and highway names and centerline data have been obtained from the City of Aurora, Department of Public Works, Geographic Information System. The adjusted centerline data were then computer plotted with the digitized floodplain data to produce the countywide Flood Insurance Rate Map panels. Floodplain data for South Platte River were added based on work maps produced by Wright Water Engineers, Inc., for the Urban Drainage and Flood Control District in September 1987. Floodplain representation was matched to that in Denver County for a reach of 1,500 feet downstream (north) of Dartmouth Avenue.

Floodplain data for 3,600 feet of West Harvard Gulch were added to Arapahoe County based on work maps and analyses produced by Gingery Associates, Inc., for the Urban Drainage and Flood Control District, October 1978. Floodplain data were tied into that in Denver County at Colorado Southern Railroad (downstream) and South Zuni Street (upstream).

Floodplain data for Littles Creek were updated based upon hydrologic and hydraulic analyses performed by J. F. Sato and Associates for FEMA under Contract No. EMW-84-C-1631, completed in August 1985.

As a result of the channel improvement project for the reach of Littles Creek downstream from the Atchison, Topeka and Santa Fe and the Denver and Rio Grande Western railroads to its confluence with the South Platte River, the 100-year base flood would be contained within the channel. The hydraulic reanalysis for this reach of Littles Creek was performed by Love and Associates, Inc., in January 1989 (Reference 82).

The LOMR issued on July 15, 1991, for the City of Greenwood Village, to show the effects of more detailed topographic information along Prentice Gulch from the confluence of Greenwood Gulch to Holly Street, was included in this update. As a result of the more detailed topographic information, the 100-year floodplain boundary, base flood elevations, and floodway boundary have been revised along Prentice Gulch. The Floodway Data Table has also been updated.

The LOMR issued on April 20, 1992, for the City of Greenwood Village to show the effects of a revised hydraulic analysis which utilized better topographic data along Greenwood Gulch from the confluence with Prentice Gulch and Highline Canal upstream to South Holly Street was included in this update. As a result of the revised hydraulic analysis, the 100-year floodplain boundary, base flood

elevations, floodway boundary, and Floodway Data Table were revised.

The LOMR issued on April 16, 1993, for the City of Greenwood Village to show the effects of channel improvements, which include realignment of the channel and more detailed topographic information along Goldsmith Gulch between East Belleview Avenue and South Yosemite Street was included in this update. As a result of the improvements and more detailed topographic information, the 100-year floodplain boundary and floodway have been shifted approximately 150 feet to the east. In addition, base flood elevations were increased a maximum of 4 feet, from approximately 450 feet upstream of East Belleview Avenue to approximately 150 feet upstream of Yosemite Street. The Floodway Data Table has also been updated. The LOMR issued on September 26, 1994, for Arapahoe County to show the effects of more detailed topographic information and the existing bridge at East Iliff Avenue along Cherry Creek, from approximately 1,000 feet downstream of East Iliff Avenue to approximately 1,050 feet upstream of East Iliff Avenue, was included in this update. As a result of the more detailed topographic information, the elevations and floodplain boundary delineations along Cherry Creek have been revised.

#### 10.4 Fourth Revision

This study was revised as part of a Digital Flood Insurance Rate Map (DFIRM) conversion for Arapahoe County and incorporated areas. This study incorporated the new countywide DFIRM conversion prepared by the UDFCD. The UDFCD contracted Merrick and Company to digitize the flood data from various sources and to prepare the data in conformance with the FEMA DFIRM specifications.

The cities of Aurora, Littleton, and Centennial were added to the DFIRM as a part of this revision. Previously, Aurora and Littleton had separate FIRMs. Centennial was incorporated after the date of the previous effective FIS and FIRM.

Flood information used for the DFIRM conversion came from three sources: the UDFCD's Flood Hazard Area Delineation studies; the work maps from the original FIS; and the work maps from several Letters of Map Revision (LOMRs).

##### Flood Hazard Area Delineation Studies

The UDFCD published a Flood Hazard Area Delineation report (Reference 83) for the Lower Box Elder Creek watershed in September 2001. This report identified flood hazard information on Box Elder Creek and Bear Gulch. This report was incorporated into this FIS.

The UDFCD published a Flood Hazard Area Delineation report (Reference 84) for the Upper Box Elder Creek watershed in December, 1995. This report identified flood hazard information on Box Elder Creek, Coyote Run and several tributaries. This report was incorporated into this FIS.

The UDFCD published a Flood Hazard Area Delineation report (Reference 85) for the Cherry Creek watershed in May, 2003. This report identified flood hazard information on Cherry Creek from Cherry Creek Reservoir to the Douglas County line. This report was incorporated into this FIS.

The UDFCD published a Flood Hazard Area Delineation report (Reference 86) for the Little Dry Creek watershed in August, 2003. This report identified flood hazard information on Little Dry Creek, Willow Creek, Greenwood Gulch, Quincy Gulch, Blackmer Gulch and Prentice Gulch. This report was incorporated into this FIS. An unpublished study revised the flood hazard information from Holly Dam to Quebec Street to correct obvious errors in the previous mapping.

The UDFCD published a Flood Hazard Area Delineation report (Reference 87) for the Upper Goldsmith Gulch watershed in April, 2005. This report identified flood hazard information on Goldsmith Gulch and the West Tributary. This report was incorporated into this FIS. An unpublished study revised the flood hazard information immediately above Caley Avenue to reflect a new detention pond.

The UDFCD published a Flood Hazard Area Delineation report (Reference 90) for the Massey Draw and SJCD 6200 watersheds in December, 2005. This report identified flood hazard information on SJCD 6200 and the North Tributary. This report was incorporated into this FIS.

The UDFCD published a Flood Hazard Area Delineation report (Reference 91) for the Murphy Creek watershed in September, 2006. This report identified flood hazard information on Murphy Creek. This report was incorporated into this FIS.

#### Letters of Map Revision (LOMRs)

All LOMRs effective after the date of the last revision (August 16, 1995) through March 16, 2010, have been incorporated into this revision.

### 10.5 Fifth Revision

This study was revised on \_\_\_\_\_, to incorporate six different Flood Hazard Area Delineation Reports from UDFCD and several LOMRs.

The UDFCD published a Flood Hazard Area Delineation report (Reference 92) for Cottonwood Creek and its tributaries in August 2011. The analysis was conducted by Muller Engineering Company, Inc., and identified flood hazard information on

Cottonwood Creek, Havana Tributary, Inverness Tributary, and Peoria Tributary. This report was incorporated into this FIS and the DFIRM.

The UDFCD published a Flood Hazard Area Delineation report (Reference 93) for upper East Toll Gate Creek in December 2010. The analysis was conducted by J3 Engineering Consultants and identified flood hazard information on East Toll Gate Creek. This report was incorporated into this FIS and the DFIRM.

The UDFCD published a Flood Hazard Area Delineation report (Reference 94) for First Creek and its tributary in October 2011. The analysis was conducted by Moser and Associates Engineering, and identified flood hazard information on First Creek, First Creek Tributary T, and First Creek – E470 Split. This report was incorporated into this FIS and the DFIRM.

The UDFCD published a Flood Hazard Area Delineation report (Reference 95) for Piney Creek and Antelope Creek in December 2011. The analysis was conducted by WRC Engineering, Inc., and identified flood hazard information on Piney Creek, Piney Creek Split Flow, Antelope Creek, and Antelope Creek Split Flow. This report was incorporated into this FIS and DFIRM.

The UDFCD published a Flood Hazard Area Delineation report (Reference 96) for Second Creek in May 2011. This analysis was conducted by Olsson Associates and Matrix Design Group, Inc., and identified flood hazard information on Second Creek upstream of Denver International Airport. This report was incorporated into this FIS and DFIRM.

The UDFCD published a Flood Hazard Area Delineation report (Reference 97) for Willow Creek in December 2010. This analysis was conducted by CH2M Hill and identified flood hazard information on Willow Creek. The existing conditions flood hazard area information developed with this report was incorporated into this FIS and DFIRM.

## 10.6 Sixth Revision

This study was revised on \_\_\_\_\_ to incorporate seven Flood Hazard Area Delineation (FHAD) studies from the Urban Drainage and Flood Control District (UDFCD). The final community coordination meeting for this study was held on \_\_\_\_\_, and was attended by FEMA, CWCB, UDFCD, the communities, and the study contractor. All issues from the meeting were resolved.

The UDFCD published a The UDFCD published a FHAD for the Cherry Creek watershed in November 2013 (Reference 98). The study used updated hydrology and hydraulic analyses to modify flood hazard information from Cherry Creek Dam to the South Platte River. This report was incorporated into this FIS.

The UDFCD published a FHAD for the Sand Creek watershed in October 2012 (Reference 99). The study revised flood hazard information along Sand Creek from Colfax Avenue to the confluence with Coal Creek and Murphy Creek; along Coal Creek from the confluence with Sand Creek to East Yale Avenue, and along Murphy Creek from the confluence with Sand Creek to approximately 1,000 feet upstream of East Alameda Avenue. This report was incorporated into this FIS.

The UDFCD published a FHAD for the Toll Gate Creek and East Toll Gate Creek watersheds in November 2013 (Reference 100). The study revised flood hazard information along Toll Gate Creek from the confluence with Sand Creek to the confluence with East and West Toll Gate Creeks, and along East Toll Gate Creek from the confluence with Toll Gate Creek to approximately 700 feet downstream of East Hampden Avenue. This report was incorporated into this FIS.

The UDFCD published a FHAD for the Happy Canyon Creek watershed in July 2014 (Reference 101). The study revised flood hazard information along Happy Canyon Creek from the confluence with Cherry Creek to the Arapahoe - Douglas County boundary; and along Green Acres Tributary from the confluence with Happy Canyon Creek to the Arapahoe - Douglas County boundary. This report was incorporated into this FIS.

The UDFCD published a FHAD for the Senac Creek watershed in November 2013 (Reference 102). The study revised flood hazard information along Senac Creek from the confluence with Coal Creek to the Aurora Reservoir Dam. This report was incorporated into this FIS.

The UDFCD published a FHAD for the West Toll Gate Creek watershed in November 2013 (Reference 103). The study revised flood hazard information along West Toll Gate Creek from the confluence with Toll Gate Creek to upstream of Quincy Reservoir, and established flood hazard information from upstream of Quincy Reservoir to approximately 2,000 feet upstream of South Riviera Way; and revised flood hazard information along Unnamed Creek from the confluence with West Toll Gate to approximately 4,100 feet upstream of Copperleaf Boulevard. This report was incorporated into this FIS.

The UDFCD published a FHAD for the Littles Creek watershed in July 2012 (Reference 104). The study revised flood hazard information from the confluence with the South Platte River to South Broadway; and established flood hazard information from South Broadway to East Dry Creek Road. This report was incorporated into this FIS.

#### Letters of Map Revision (LOMRs)

The LOMR issued May 22, 2015 Case No. 14-08-1180P for Unincorporated Areas of Arapahoe County, revised the FIRM to reflect changes along Cherry Creek due to construction of a culvert, bridge, excavation, and fill. Revisions occurred along Cherry Creek from approximately 4,170 feet downstream of East Broncos Parkway to approximately 1,790 feet upstream.

The LOMR issued September 5, 2014 Case No. 13-08-1142P for Unincorporated Areas of Arapahoe County, revised the FIRM to reflect changes along Cherry Creek due to construction of a bridge, excavation, and fill. Revisions occurred along Cherry Creek from approximately 330 feet downstream of East Broncos Parkway to approximately 6,450 feet upstream.

The LOMR issued February 10, 2012 for the City of Aurora, revised the FIRM to reflect changes along Sable Ditch due to construction of a culvert, channel relocation, channelization, detention basin, excavation, and fill. Revisions occurred along Sable Ditch from the confluence with Toll Gate Creek to approximately 1,040 feet upstream of North Jasper Street.

The LOMR issued March 10, 2011 for the City of Aurora, revised the FIRM to reflect changes along Sand Creek due to construction of a culvert, bridge, excavation, fill, and retention basin. Revisions occurred along Sand Creek from approximately 1,410 feet downstream of North Peoria Street to Approximately 1,040 feet downstream of I-225.

The LOMR issued December 18, 2010 Case No. 10-08-1061P for Unincorporated Areas of Arapahoe County, reissues Case No. 10-08-0186P that revised the FIRM to reflect changes along Unnamed Creek and Tributary to Unnamed Creek due to construction of a culvert, excavation, fill, and a detention basin. Revisions occurred along the Tributary to Unnamed Creek from the confluence with Unnamed Creek to approximately 260 feet downstream of East Belleview Place. Revisions along Unnamed Creek have been superseded by this study.

This revision supersedes the Letter of Map Revision (LOMR) issued June 10, 2016, (Case No. 15-08-1386P), for the City of Aurora, Colorado

This revision supersedes the Letter of Map Revision (LOMR) issued July 10, 2015, (Case No. 14-08-0918P), for the City of Aurora, Colorado

This revision supersedes the Letter of Map Revision (LOMR) issued October 11, 2013, (Case No. 13-08-0148P), for the City of Aurora, Colorado

This revision supersedes the Letter of Map Revision (LOMR) issued December 17, 2012, (Case No. 12-08-0619P), for the Unincorporated Areas of Arapahoe County, Colorado

## 11.0 MAP REPOSITORIES

For previous versions of the FIRM Index, the Map Repository information was included on the FIRM Index itself. The map repositories are listed in Table 7 in the FIS.

Table 7 – Map Repositories

Community	Address	City	State	Zip Code
Arapahoe County, Unincorporated Areas	6924 South Lima Street	Centennial	CO	80112
City of Aurora	15151 East Alameda Parkway, Suite 3200	Aurora	CO	80012
City of Centennial	6924 South Lima Street	Centennial	CO	80112
City of Cherry Hills Village	2450 East Quincy Avenue	Cherry Hills Village	CO	80110
Town of Columbine Valley	5931 South Middlefield Road	Columbine Valley	CO	80123
City of Deer Trail	555 Second Avenue	Deer Trail	CO	80105
City of Englewood	3400 South Elati Street	Englewood	CO	80110
Town of Foxfield	18896 East Powers Drive	Aurora	CO	80015
City of Glendale	950 South Birch	Glendale	CO	80222
City of Greenwood Village	6060 South Quebec Street	Greenwood Village	CO	80111
City of Littleton	2255 West Berry Avenue	Littleton	CO	80165
City of Sheridan	4101 South Federal Boulevard	Sheridan	CO	80110

APPENDIX A  
Figure 6 NOTES TO USERS

**NOTES TO USERS**

For information and questions about this map, available products associated with this FIRM including historic versions of this FIRM, how to order products, or the National Flood Insurance Program in general, please call the FEMA Map Information eXchange at 1-877-FEMA-MAP (1-877-336-2627) or visit the FEMA Map Service Center website at <http://msc.fema.gov>. Available products may include previously issued Letters of Map Change, a Flood Insurance Study Report, and/or digital versions of this map. Many of these products can be ordered or obtained directly from the website. Users may determine the current map date for each FIRM panel by visiting the FEMA Map Service Center website or by calling the FEMA Map Information eXchange.

Communities annexing land on adjacent FIRM panels must obtain a current copy of the adjacent panel as well as the current FIRM Index. These may be ordered directly from the Map Service Center at the number listed above.

To determine if flood insurance is available in the community, contact your insurance agent or call the National Flood Insurance Program at 1-800-638-6620.

PRELIMINARY FIS REPORT: FEMA maintains information about map features, such as street locations and names, in or near designated flood hazard areas. Requests to revise information in or near designated flood hazard areas may be provided to FEMA during the community review period, at the final Consultation Coordination Officer's meeting, or during the statutory 90-day appeal period. Approved requests for changes will be shown on the final printed FIRM.

The map is for use in administering the NFIP. It may not identify all areas subject to flooding, particularly from local drainage sources of small size. Consult the community map repository to find updated or additional flood hazard information.

BASE FLOOD ELEVATIONS: For more detailed information in areas where Base Flood Elevations (BFEs) and/or floodways have been determined, consult the Flood Profiles and Floodway Data and/or Summary of Stillwater Elevations tables within this FIS Report. Use the flood elevation data within the FIS Report in conjunction with the FIRM for construction and/or floodplain management.

FLOODWAY INFORMATION: Boundaries of the floodways were computed at cross sections and interpolated between cross sections. The floodways were based on hydraulic considerations with regard to requirements of the National Flood Insurance Program. Floodway widths and other pertinent floodway data are provided in the FIS Report for this jurisdiction.

FLOOD CONTROL STRUCTURE INFORMATION: Certain areas not in Special Flood Hazard Areas may be protected by flood control structures. Refer to the "Flood Protection Measures" section of this FIS Report for information on flood control structures for this jurisdiction

**PROJECTION INFORMATION:** The projection used in the preparation of the map was Universal Transverse Mercator (UTM) Zone 10. The horizontal datum was NAD83, GRS1980 spheroid. Differences in datum, spheroid, projection or State Plane zones used in the production of FIRMs for adjacent jurisdictions may result in slight positional differences in map features across jurisdiction boundaries. These differences do not affect the accuracy of the FIRM.

**ELEVATION DATUM:** Flood elevations on the FIRM are referenced to the North American Vertical Datum of 1988. These flood elevations must be compared to structure and ground elevations referenced to the same vertical datum. For information regarding conversion between the National Geodetic Vertical Datum of 1929 and the North American Vertical Datum of 1988, visit the National Geodetic Survey website at <http://www.ngs.noaa.gov/> or contact the National Geodetic Survey at the following address:

*NGS Information Services  
NOAA, N/NGS12  
National Geodetic Survey  
SSMC-3, #9202  
1315 East-West Highway  
Silver Spring, Maryland 20910-3282  
(301) 713-3242*

Local vertical monuments may have been used to create the map. To obtain current monument information, please contact the appropriate local community listed on the FIRM Index.

**BASE MAP INFORMATION:** Base map information shown on the FIRM was provided by shown on this FIRM was provided by the Arapahoe County GIS. Additional input was provided by the Cities of Aurora and Littleton. These data are current as of 2004.

The map reflects more detailed and up-to-date stream channel configurations than those shown on the previous FIRM for this jurisdiction. The floodplains and floodways that were transferred from the previous FIRM may have been adjusted to conform to these new stream channel configurations. As a result, the Flood Profiles and Floodway Data tables may reflect stream channel distances that differ from what is shown on the map.

Corporate limits shown on the map are based on the best data available at the time of publication. Because changes due to annexations or de-annexations may have occurred after the map was published, map users should contact appropriate community officials to verify current corporate limit locations.

### **NOTES FOR FIRM INDEX**

**REVISIONS TO INDEX:** As new studies are performed and FIRM panels are updated within Arapahoe County, CO, corresponding revisions to the FIRM Index will be incorporated within the FIS Report to reflect the effective dates of those panels. Please refer to the FIRM Index to determine the most recent FIRM revision date for each community. The most recent FIRM panel effective date will correspond to the most recent index date.

**ATTENTION:** The corporate limits shown on this FIRM index are based on the best information available at the time of publication. As such, they may be more current than those shown on the FIRM panels issued before the most recent FIRM panel date

**SPECIAL NOTES FOR SPECIFIC FIRM PANELS**


This Notes to Users section was created specifically for Arapahoe County, CO.

ACCREDITED LEVEE NOTES TO USERS: Check with your local community to obtain more information, such as the estimated level of protection provided (which may exceed the 1-percent-annual-chance level) and Emergency Action Plan, on the levee system(s) shown as providing protection for areas on this panel. To mitigate flood risk in residual risk areas, property owners and residents are encouraged to consider flood insurance and floodproofing or other protective measures. For more information on flood insurance, interested parties should visit the FEMA Website at <http://www.fema.gov/business/nfip/index.shtm>.

FLOOD RISK REPORT: A Flood Risk Report (FRR) may be available for many of the flooding sources and communities referenced in this FIS Report. The FRR is provided to increase public awareness of flood risk by helping communities identify the areas within their jurisdictions that have the greatest risks. Although non-regulatory, the information provided within the FRR can assist communities in assessing and evaluating mitigation opportunities to reduce these risks. It can also be used by communities developing or updating flood risk mitigation plans. These plans allow communities to identify and evaluate opportunities to reduce potential loss of life and property. However, the FRR is not intended to be the final authoritative source of all flood risk data for a project area; rather, it should be used with other data sources to paint a comprehensive picture of flood risk.

Figure 7. MAP LEGEND FOR FIRM

**SPECIAL FLOOD HAZARD AREAS:** *The 1% annual chance flood, also known as the base flood or 100-year flood, has a 1% chance of happening or being exceeded each year. Special Flood Hazard Areas are subject to flooding by the 1% annual chance flood. The Base Flood Elevation is the water surface elevation of the 1% annual chance flood. The floodway is the channel of a stream plus any adjacent floodplain areas that must be kept free of encroachment so that the 1% annual chance flood can be carried without substantial increases in flood heights. See note for specific types. If the floodway is too narrow to be shown, a note is shown.*



Special Flood Hazard Areas subject to inundation by the 1% annual chance flood (Zones A, AE, AH, AO, AR, A99, V and VE)

Zone A The flood insurance rate zone that corresponds to the 1% annual chance floodplains. No base (1% annual chance) flood elevations (BFEs) or depths are shown within this zone.

Zone AE The flood insurance rate zone that corresponds to the 1% annual chance floodplains. Base flood elevations derived from the hydraulic analyses are shown within this zone, either at cross section locations or as static whole-foot elevations that apply throughout the zone.

Zone AH The flood insurance rate zone that corresponds to the areas of 1% annual chance shallow flooding (usually areas of ponding) where average depths are between 1 and 3 feet. Whole-foot BFEs derived from the hydraulic analyses are shown at selected intervals within this zone.

- Zone AO The flood insurance rate zone that corresponds to the areas of 1% annual chance shallow flooding (usually sheet flow on sloping terrain) where average depths are between 1 and 3 feet. Average whole-foot depths derived from the hydraulic analyses are shown within this zone.
- Zone AR The flood insurance rate zone that corresponds to areas that were formerly protected from the 1% annual chance flood by a flood control system that was subsequently decertified. Zone AR indicates that the former flood control system is being restored to provide protection from the 1% annual chance or greater flood.
- Zone A99 The flood insurance rate zone that corresponds to areas of the 1% annual chance floodplain that will be protected by a Federal flood protection system where construction has reached specified statutory milestones. No base flood elevations or flood depths are shown within this zone.
- Zone V The flood insurance rate zone that corresponds to the 1% annual chance coastal floodplains that have additional hazards associated with storm waves. Base flood elevations are not shown within this zone.
- Zone VE Zone VE is the flood insurance rate zone that corresponds to the 1% annual chance coastal floodplains that have additional hazards associated with storm waves. Base flood elevations derived from the coastal analyses are shown within this zone as static whole-foot elevations that apply throughout the zone.



Regulatory Floodway determined in Zone AE.

**OTHER AREAS OF FLOOD HAZARD**



Shaded Zone X: Areas of 0.2% annual chance flood hazards and areas of 1% annual chance flood hazards with average depths of less than 1 foot or with drainage areas less than 1 square mile.



Future Conditions 1% Annual Chance Flood Hazard – Zone X: The flood insurance rate zone that corresponds to the 1% annual chance floodplains that are determined based on future-conditions hydrology. No base flood elevations or flood depths are shown within this zone.




Area with Reduced Flood Risk due to Levee: Areas where an accredited levee, dike, or other flood control structure has reduced the flood risk from the 1% annual chance flood. See Notes to Users for important information.

**OTHER AREAS**




Zone D (Areas of Undetermined Flood Hazard): The flood insurance rate zone that corresponds to unstudied areas where flood hazards are undetermined, but possible.



Unshaded Zone X: Areas of minimal flood hazard.

**FLOOD HAZARD AND OTHER BOUNDARY LINES**



Flood Zone Boundary (white line on ortho-photography-based mapping; gray line on vector-based mapping)



Limit of Study




Jurisdiction Boundary




Limit of Moderate Wave Action (LiMWA): Indicates the inland limit of the area affected by waves greater than 1.5 feet

**GENERAL STRUCTURES**



*Aqueduct  
Channel  
Culvert  
Storm Sewer*

Channel, Culvert, Aqueduct, or Storm Sewer



*Dam  
Jetty  
Weir*

Dam, Jetty, Weir



Levee, Dike, or Floodwall




*Bridge*

Bridge


**COASTAL BARRIER RESOURCES SYSTEM (CBRS) AND OTHERWISE PROTECTED AREAS**

**(OPA):** *CBRS areas and OPAs are normally located within or adjacent to Special Flood Hazard Areas. See Notes to Users for important information.*



**CBRS AREA**  
09/30/2009

Coastal Barrier Resources System Area: Labels are shown to clarify where this area shares a boundary with an incorporated area or overlaps with the floodway.



**OTHERWISE PROTECTED  
AREA**  
09/30/2009

Otherwise Protected Area


**REFERENCE MARKERS**



22.0

River mile Markers

**CROSS SECTION & TRANSECT INFORMATION**



20.2

Lettered Cross Section with Regulatory Water Surface Elevation (BFE)




21.1

Numbered Cross Section with Regulatory Water Surface Elevation (BFE)



17.5

Unlettered Cross Section with Regulatory Water Surface Elevation (BFE)



8

Coastal Transect



Profile Baseline: Indicates the modeled flow path of a stream and is shown on FIRM panels for all valid studies with profiles or otherwise established base flood elevation.



Coastal Transect Baseline: Used in the coastal flood hazard model to represent the 0.0-foot elevation contour and the starting point for the transect and the measuring point for the coastal mapping.



513

Base Flood Elevation Line

**ZONE AE  
(EL 16)**

Static Base Flood Elevation value (shown under zone label)

**ZONE AO  
(DEPTH 2)**

Zone designation with Depth

**ZONE AO  
(DEPTH 2)  
(VEL 15 FPS)**

Zone designation with Depth and Velocity

**BASE MAP FEATURES**



*Missouri Creek*

River, Stream or Other Hydrographic Feature



234

Interstate Highway

	U.S. Highway
	State Highway
	County Highway
MAPLE LANE 	Street, Road, Avenue Name, or Private Drive if shown on Flood Profile
 RAILROAD	Railroad
	Horizontal Reference Grid Line
	Horizontal Reference Grid Ticks
	Secondary Grid Crosshairs
Land Grant	Name of Land Grant
7	Section Number
R. 43 W. T. 22 N.	Range, Township Number
$4276^{000m}E$	Horizontal Reference Grid Coordinates (UTM)
<b>365000 FT</b>	Horizontal Reference Grid Coordinates (State Plane)
<b>80° 16' 52.5"</b>	Corner Coordinates (Latitude, Longitude)